

Code: DS-2DE5225IW-AE

# IP SPEED DOME CAMERA OUTDOOR **DS-2DE5225IW-AE** - 1080p 4.8 ... 120 mm Hikvision

Net: **683.86 EUR** Gross: **683.86 EUR**

IP camera equipped with very good high resolution sensor. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

Built-in IR illuminator allows to operate at night conditions, and vari-focal lens with wide range of view angle adjustment enables optimal set the view field of camera to all conditions. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

PoE powering possibility, compatible with the Hi-PoE standard makes the device more universal and easier to install.

For a few models of IP cameras working at  $\geq 1920 \times 1080$  resolution we recommend to use of network with 1Gb/s bandwidth.



## SPECIFICATION

|                                  |                                                                         |
|----------------------------------|-------------------------------------------------------------------------|
| Standard:                        | TCP/IP                                                                  |
| Sensor:                          | 1/2.8 " Progressive Scan CMOS                                           |
| Matrix size:                     | 2.1 Mpx                                                                 |
| Resolution:                      | 1920 x 1080 - 1080p<br>1280 x 960 - 1.3 Mpx<br>1280 x 720 - 720p        |
| Scanning system:                 | Progressive                                                             |
| Lens:                            | 4.8 ... 120 mm                                                          |
| View angle:                      | 58 ° ... 2.5 ° (manufacturer data)<br>54 ° ... 3.0 ° (our tests result) |
| Optical zoom:                    | x 25                                                                    |
| Digital zoom:                    | x 16                                                                    |
| Range of IR illumination:        | 150 m                                                                   |
| S/N ratio:                       | > 52 dB (AGC off)                                                       |
| Video output:                    | —                                                                       |
| Preset rotation speed:           | • 120 °/s (horizontal)<br>• 80 °/s (vertical)                           |
| Rotation speed (manual control): | 0.1 °/s ... 120 °/s (horizontal)<br>0.1 °/s ... 80 °/s (vertical)       |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Horizontal rotation range:     | 360 ° - continuous                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Vertical rotation range:       | -15 ° ... 90 °                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| RS-485 interface:              | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Number of presets:             | 300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Horizontal scan:               | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Route settings:                | 8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Park action:                   | Call the set function (tour, scan, etc.) after specified dwell time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Image compression method:      | H.265 / H.265+ / H.264 / H.264+ / MJPEG                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Bitrate:                       | 32 ... 16384 kbps                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Alarm inputs / outputs:        | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Audio:                         | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Main stream frame rate:        | 1 ... 25 fps - 1080p<br>1 ... 50 fps - 1.3 Mpx                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Network interface:             | 10/100 Base-T (RJ-45)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Network protocols:             | IPv4/IPv6, HTTP, HTTPS, IEEE 802.1x, QoS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP/IP, UDP, IGMP, ICMP, DHCP, PPPoE, Bonjour                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| WEB Server:                    | Built-in, NVR compliance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Max. number of on-line users:  | 20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| ONVIF:                         | 16.12                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Memory card slot:              | Micro SD memory cards up to 256GB support (possible local recording)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Mobile phones support:         | Port no.: 8000 or access by a cloud (P2P)<br>• Android: Free application <a href="#">iVMS-4500</a> or <a href="#">Hik-Connect</a><br>• iOS (iPhone): Free application <a href="#">iVMS-4500</a> or <a href="#">Hik-Connect</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Default admin user / password: | admin / -<br>The administrator password should be set at the first start                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Default IP address:            | 192.168.1.64                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Web browser access ports:      | 80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| PC client access ports:        | Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Mobile client access ports:    | 8000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Port ONVIF:                    | 80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| RTSP URL:                      | <ul style="list-style-type: none"> <li>• Main stream<br/>rtsp://192.168.1.64:554/Streaming/Channels/101/ - RTSP - without authorization<br/>rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ - with authorization</li> <li>• Sub stream<br/>rtsp://192.168.1.64:554/Streaming/Channels/102/ - RTSP - without authorization<br/>rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/ - with authorization</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                          |
| Main features:                 | <ul style="list-style-type: none"> <li>• WDR - 120 dB - Wide Dynamic Range</li> <li>• 3D-DNR - Digital Noise Reduction</li> <li>• EIS - Electronic Image Stabilization</li> <li>• ROI - improve the quality of selected parts of image</li> <li>• F-DNR (Defog) - Reduction of image noise caused by precipitation</li> <li>• BLC/HLC - Back Light / High Light Compensation</li> <li>• Intelligent Image Analysis : crossing the line (tripwire), detection of entry into the area / exit from the area, intrusion, abandoned/missing object</li> <li>• Intelligent 3D Positioning System</li> <li>• ICR - Movable InfraRed filter</li> <li>• Configurable Privacy Zones - 8</li> <li>• Motion Detection</li> <li>• Sharpness - sharper image outlines</li> <li>• Mirror - Mirror image</li> <li>• Day/Night mode (color/b&amp;w/auto)</li> </ul> |



|                        |                                                                                                                                                                                                                                       |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply:          | <ul style="list-style-type: none"> <li>• Hi-PoE,</li> <li>• 24 V AC / 2.2 A (power adapter included)</li> </ul>                                                                                                                       |
| Power consumption:     | ≤ 30 W                                                                                                                                                                                                                                |
| Housing:               | Speed Dome, Metal / Plastic                                                                                                                                                                                                           |
| Color:                 | White                                                                                                                                                                                                                                 |
| Operation temp:        | -30 °C ... 65 °C                                                                                                                                                                                                                      |
| "Index of Protection": | IP66                                                                                                                                                                                                                                  |
| Weight:                | 3.34 kg                                                                                                                                                                                                                               |
| Dimensions:            | Ø 208 x 345 mm (without bracket)                                                                                                                                                                                                      |
| Supported languages:   | Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Hungarian, Vietnamese, Italian |
| Manufacturer / Brand:  | Hikvision                                                                                                                                                                                                                             |
| SAP Code:              | 301312111                                                                                                                                                                                                                             |
| Guarantee:             | <b>3 years</b>                                                                                                                                                                                                                        |

## PRESENTATION

Bottom view:




Micro SD card slot is located inside the camera:



Camera connectors:



Camera dimensions:

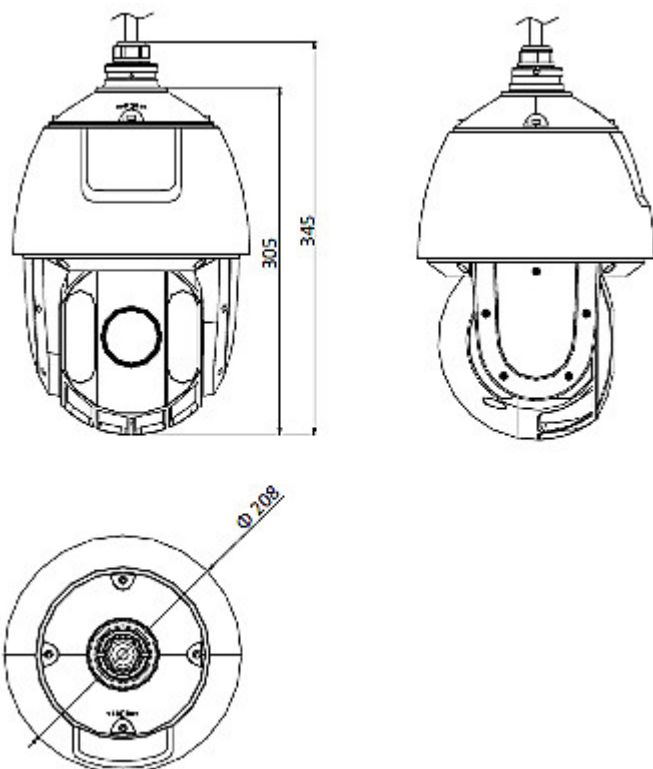

In the kit:



## OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

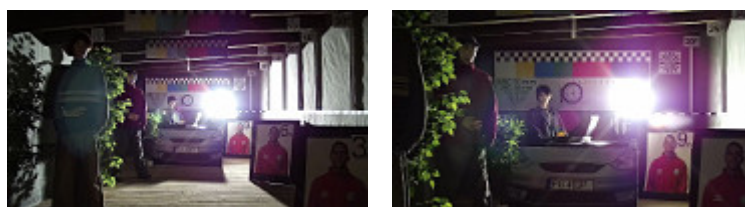

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|