

Code: DS-KD8003-IME1/FLUSH/EU

VIDEO DOORPHONE MODULE **DS-KD8003-IME1/FLUSH/EU** Hikvision

Net: **218.82 EUR** Gross: **218.82 EUR**

The DS-KD8003-IME1/FLUSH/EU is the main unit of the video doorphone modular system of the Hikvision brand.
Using the DS-KD8003-IME1/FLUSH/EU main unit, the video doorphone system can be extended to a maximum of 8 extension modules.
Video Doorphone is mounted in a flush-mounted housing.



SPECIFICATION

Compatibility:	Hikvision - DS-KD-xx
Doorbell button:	1 pcs
Sensor:	2.1 Mpx CMOS
Camera resolution:	1920 x 1080 - 1080p
Camera view angle:	180 °
Image compression method:	H.264
IR illuminator:	✓
Ethernet:	10/100 Mb/s
Network protocols:	TCP/IP, RTSP
Alarm inputs:	4 pcs
Relay outputs:	2 x NO/NC
Main features:	• Bidirectional communication, • Microphone built-in, • Speakers built-in, • Noise suppression and echo cancellation, • Tamper detection - removing from mounting surface, • Video Doorphone is mounted in a flush-mounted housing
Power supply:	• PoE (802.3af), • 12 V DC
Power consumption:	≤ 10 W
Operation temp:	-40 °C ... 60 °C

Housing:	Metal
Color:	Graphite
"Index of Protection":	IP65
Weight:	0.64 kg
Dimensions:	124 x 134 x 37 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, French, Greek, Spanish, Dutch, German, Portuguese, Russian, Romanian, Serbian, Turkish, Hungarian, Vietnamese, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	305301496
Guarantee:	3 years

PRESENTATION

Front panel:



Rear view:



Connectors view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Device taken out from the housing:



Example of application:

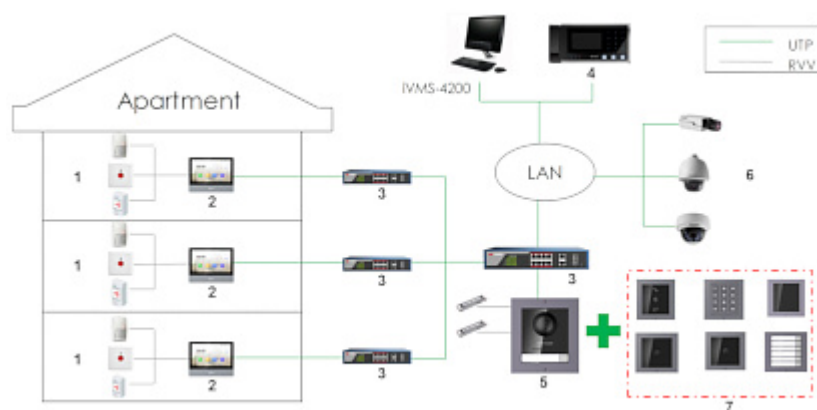

1. Alarm sensors
 2. INDOOR PANEL
 3. Switch PoE
 4. Guard station
 5. Main unit powered by PoE switch
 6. IP cameras
 7. Expansion modules
- In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

