

Code: DS-KD-IN

DEVICE STATUS SIGNAL MODULE **DS-KD-IN** Hikvision

Net: **49.14 EUR** Gross: **49.14 EUR**

The DS-KD-IN module is designed to work with the DS-KD8003-IME1 or DS-KD8003-IME2 video doorphone module. The device is used for visual signaling of the voice connection status of the video doorphone with an internal panel and the opening status of the wicket.

Installation of DS-KD-xx series modules takes place in dedicated DS-KD-ACF series housings (flush-mounted housings) and DS-KD-ACW series housings (surface-mounted housings). The masking frames attached to the housings of both series are made of aluminum.



SPECIFICATION

Compatibility:	DS-KD8003-IME1, DS-KD8003-IME2
LED indication:	• Connection establishing • Bidirectional audio transmission • Gate opening
Power supply:	Supplied by DS-KD8003-IME1 or DS-KD8003-IME2
Power consumption:	≤ 2 W
Permissible relative humidity:	10 ... 95 % (non-condensing)
"Index of Protection":	IP65
Housing:	Plastic
Color:	Black
Operation temp:	-40 °C ... 60 °C
Weight:	0.16 kg
Dimensions:	100 x 98 x 34 mm
Manufacturer / Brand:	Hikvision
SAP Code:	305301210
Guarantee:	3 years

PRESENTATION

Front panel:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Rear view:






Configuration switches:



Connectors:



Example of application:

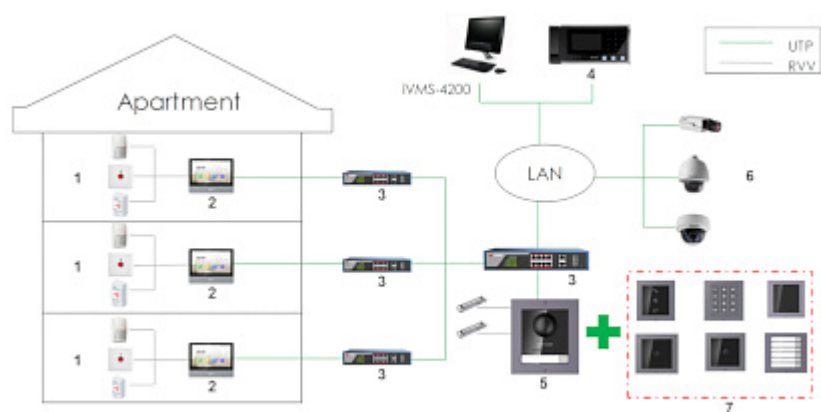

1. Alarm sensors
2. INDOOR PANEL
3. Switch PoE
4. Guard station
5. Main unit powered by PoE switch
6. IP cameras
7. Expansion modules

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------