

Code: ATE-CAM-IPC925

IP MOBILE CAMERA **ATE-CAM-IPC925** - 1080p 2.8 mm AUTONE

Net: **59.12 EUR** Gross: **59.12 EUR**

Mobile IP camera equipped with M12, 6-pin - code A connector, providing image in maximum resolution Full HD, 1080p.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " SC2235 CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p
Lens:	2.8 mm
View angle:	• 95 ° (manufacturer data) • 87 ° (our tests result)
Range of IR illumination:	10 m
S/N ratio:	≥ 58 dB
RS-485 interface:	—
Memory card slot:	—
Image compression method:	H.264
Alarm inputs / outputs:	—
Audio:	—
Main stream frame rate:	20 fps @ 1080p
ONVIF:	✓
Network interface:	10/100 Base-T - M12, 6-pin socket - Code A
Main features:	• Motion Detection • Auto White Balance • AGC - Automatic Gain Control • BLC - Back Light Compensation
Mobile phones support:	—

Default IP address:	192.168.1.3
Default user password:	admin / -
Web browser access ports:	8899
PC client access ports:	8899
Power supply:	12 V DC / 600 mA
Power consumption:	≤ 5 W
Housing:	Dome, Metal
Color:	White
"Index of Protection":	IP65
Operation temp:	-20 °C ... 60 °C
Weight:	0.29 kg
Dimensions:	99 x 97 x 57 mm
Supported languages:	English
Manufacturer / Brand:	AUTONE
Guarantee:	2 years


PRESENTATION

Camera view after remove the Dome cover:



Camera mounting dimensions:



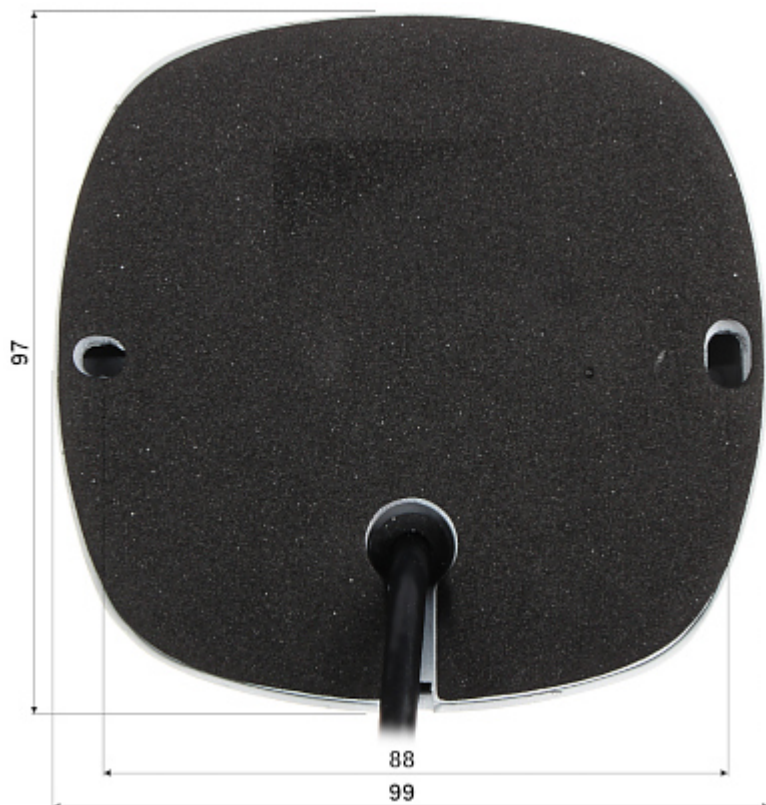

M12 connector:

- 1 DC+
- 2 DC-
- 3 TX+
- 4 TX-
- 5 RX+
- 6 RX-



In the kit:



OUR TESTS

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



- Very good quality image.
- Solid workmanship.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------