

Code: ATE-N0401EF-T2

IP MOBILE DVR **ATE-N0401EF-T2** 4 CHANNELS AUTONE

Net: **611.75 EUR** Gross: **611.75 EUR**

The ATE-N0401EF-T2 is a recorder designed for mobile applications, e.g. in buses, city buses, trams or fleet vehicles.

Device features:

- Recording of the traveled route of the vehicle using the GPS receiver.
- Access to live view, recordings and saved paths through a dedicated server.
- Free account on the producer's server.
- The CMSV6 server application for Windows (free license for 10 devices).
- The ability to copy recordings from the device to your own server via the Wi-Fi interface.

The device has been designed to be resistant to vibrations and shocks. Data can be saved to 2 SD cards or 2.5" hard disk.

The power cords are connected to the car system in the same way as a standard radio receiver. Connecting the "behind the ignition" line enables the use of the automatic start function of the recorder.

The device has a battery backup that allows recording for 10 seconds after switching off the engine.



SPECIFICATION

Video inputs:	4 pcs Ethernet + PoE - M12, 6-pin socket
Video outputs:	• 1 pcs HDMI • 1 pcs VGA • 1 pcs Video, CVBS : M12, 6-pin socket - CINCH, on the cable
Resolution of recording video files:	max. 1920 x 1080 - 1080p
Recording modes:	Manual, Sensor, Motion detection, Schedule
Supported hard drives:	1 pcs 2.5 " - 2 TB SATA
Max. capacity of memory card:	2 x 128 GB SD/SDHC
Image compression method:	H.264
GPS:	✓
SIM socket:	mini SIM
Wi-Fi module:	✓
RS-485:	✓
Alarm inputs / outputs:	8 / 1
Power supply:	8 V ... 36 V DC
Main features:	• Powering the cameras with 12V DC voltage directly from recorder - M12 connector • Alarms and maintenance events registration • Motion Detection • Auto recording after power on • Firmware upgrade via USB port • 3G / 4G support • Recording of the traveled route of the vehicle using the GPS receiver • Access to live view, recordings and saved paths through a dedicated server • Free account on the producer's server • The CMSV6 server application for Windows (free license for 10 devices) • The ability to copy recordings from the device to your own server via the Wi-Fi interface
Vibration resistance:	✓

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Operation temp:	-20 °C ... 70 °C
Permissible relative humidity:	10 % ... 95 % RH
Weight:	1.1 kg
Dimensions:	185 x 149 x 58 mm
Supported languages:	Polish, English, Chinese, Chinese Traditional, Korean, Russian
Manufacturer / Brand:	AUTONE
Guarantee:	2 years

PRESENTATION

Front view:



View after open the front cover:

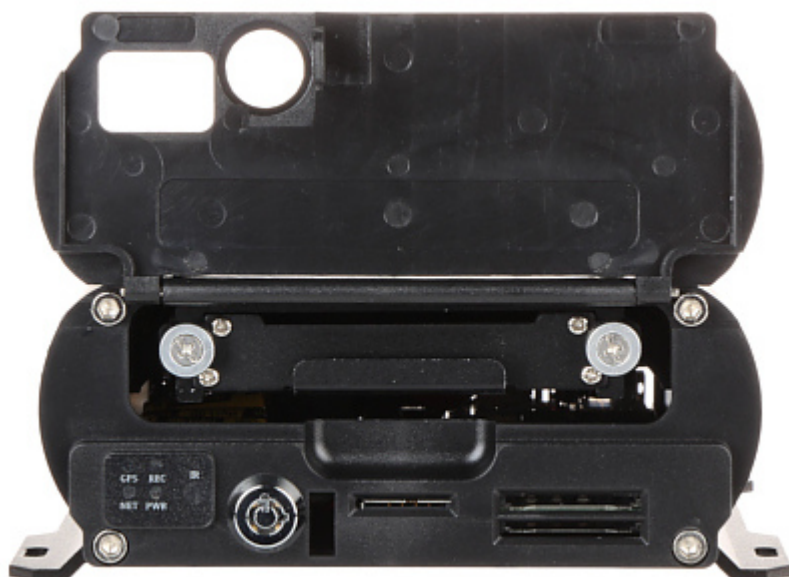

The device is equipped with SATA 2.5" HDD mobile rack:



Rear view:



M12 connector:

1 DC+
2 DC-
3 TX+
4 TX-
5 RX+
6 RX-



In the kit:



OUR OPINIONS



- Solid workmanship.
- Small dimensions of the device.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------