

Code: VTO2111D-P-S2

VIDEO DOORPHONE **VTO2111D-P-S2** DAHUA

Net: **201.23 EUR** Gross: **201.23 EUR**

The device works with video doorphones, and other DAHUA panels. Video Doorphone is mounted in a surface housing.



SPECIFICATION

Compatibility:	DAHUA
Sensor:	1/4 ", 1 Mpx CMOS
View angle:	107 °
Image compression method:	H.264
IR illuminator:	✓
Resolution:	• Main stream : 800 x 480, 1280 x 720, 720 x 576 • Sub stream : 1920 x 1080, 800 x 480, 720 x 576, 352 x 288, 320 x 240
proximity reader built-in:	Access control cards - 13.56 MHz S50
The number of subscribers served:	1
Main features:	• It can only work with the mobile application, without the VTH monitor • The function of the monitor with the ability to open the door can be a smartphone, tablet or the VTH indoor panel • Motion Detection • WDR - Wide Dynamic Range • Bidirectional communication, • Microphone built-in, • Speakers built-in, • Tamper detection - opening the enclosure, • Door contact and request button for exit inputs
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Power supply:	• PoE (802.3af), • 12 V DC / 1000 mA

Power consumption:	≤ 5 W
Housing:	Plastic, Waterproof
Color:	Graphite
"Index of Protection":	IP65 - after additional sealing the housing connection with the mounting surface, e.g. with silicone
Operation temp:	-30 °C ... 60 °C
Weight:	0.16 kg
Dimensions:	135 x 71 x 35 mm
Supported languages:	Polish, English, Bulgarian, Czech, Finnish, Slovenian, Slovak, Hungarian
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front view:



Rear view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Connectors description:



In the kit:

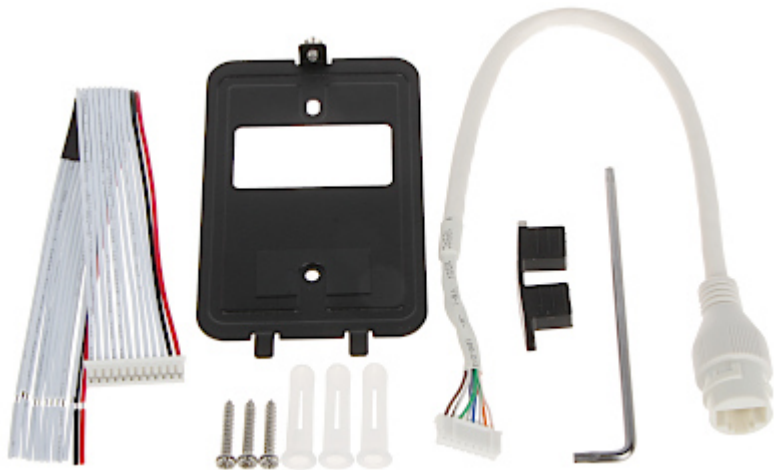

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

