

Code: DS-KIS101-P/SURFACE

VIDEO DOORPHONE KIT **DS-KIS101-P/SURFACE** Hikvision

Net: **179.85 EUR** Gross: **179.85 EUR**

Video Doorphone set of the Hikvision brand with a door station mounted in a surface housing and a 7" colored screen. The DS-KIS101-P/SURFACE doesn't need any additional configuration (after connecting according to the diagram the device is ready to operate).

Video Doorphone is mounted in a surface-mounted housing. The set includes: DS-KH1200 indoor panel, DS-KV1101-ME2 video doorphone, surface-mounted housing and 48V/0.8A switching adapter.

ATTENTION! The device does not support the HIKVISION IP system.



SPECIFICATION

Sensor:	CMOS - 2 Mpx HD
Camera view angle:	100 °
IR illuminator:	—
proximity reader built-in:	—
Video output:	1 Vpp, CVBS - pair of wires compatible with HIKVISION analog video door-phone system
Audio inputs:	1 - Microphone
Audio outputs:	1 - Speaker
Main features:	• WDR - Wide Dynamic Range • Output button support : 2 • Door status detection : 2 • Power output : 12 V DC / 1 A • Volume adjustment • Illuminated button and signboard for the surname - White backlight • Tamper protections • Surface mount • Rain cover included • The maximum number of gate stations in the system : 2
Power supply:	48 V DC / 0.5 A
Power consumption:	≤ 12 W (operation)
Housing:	Metal, Waterproof
Color:	Silver
"Index of Protection":	IP65
Vandal-proof:	IK07
Operation temp:	-30 °C ... 60 °C
Weight:	0.27 kg
Dimensions:	150 x 82 x 24 mm

INDOOR PANEL:

Shield:	7 " TFT-LCD color matrix
---------	--------------------------

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Resolution:	1024 x 600 px
Main features:	• Plug & Play, • Preview image from the door station with the possibility of turning on the sound and opening the gate, • Touch control keys, • Smooth volume control, • Microphone built-in, • Speakers built-in, • Bidirectional communication - compatible with HIKVISION analog video door-phone system • Surface mount • In the kit : Bracket • The maximum number of indoor panels in the system : 3
Housing:	Plastic
Color:	White
Power supply:	48 V DC / 0.8 A (power adapter included)
Power consumption:	≤ 5 W
Operation temp:	-10 °C ... 50 °C
Weight:	0.34 kg
Dimensions:	187 x 137 x 25 mm

ENCLOSURE:

Material:	Plastic
Color:	Silver
Weight:	0.07 kg
External dimensions:	161 x 87 x 43 mm


General information:

Manufacturer / Brand:	Hikvision
SAP Code:	305302266
Guarantee:	3 years

PRESENTATION

INDOOR PANEL:

Front view:

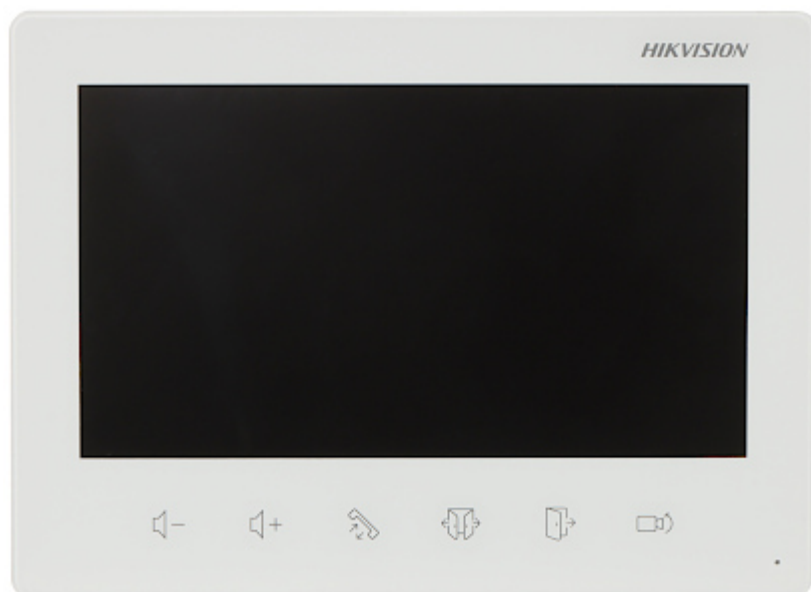


Rear view:





Connectors:

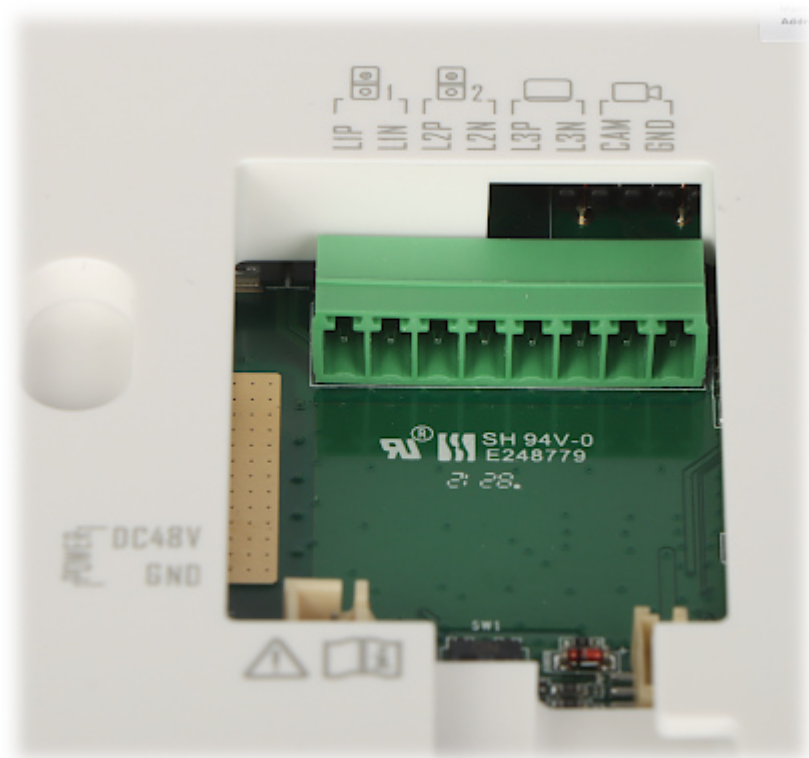

VIDEO DOORPHONE:
Front view:






Mounting side view:




Connectors:



Connectors description:

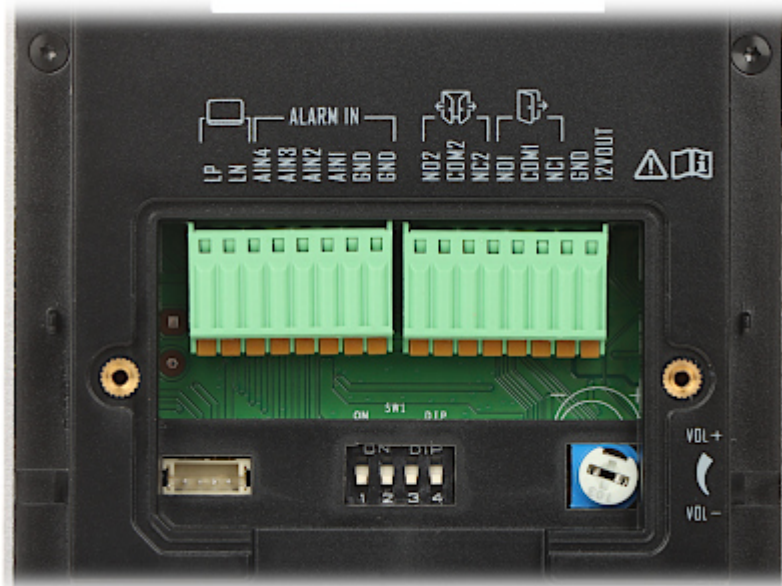

In the kit:

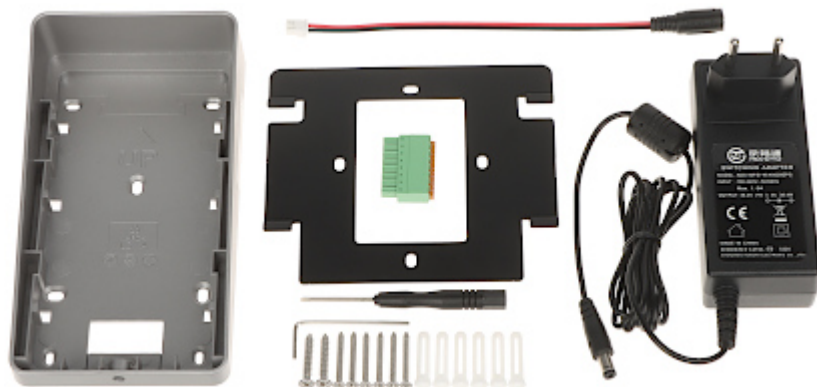

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

