

Code: DS-KV8202-IM

VIDEO DOORPHONE **DS-KV8202-IM** Hikvision

Net: **246.05 EUR** Gross: **246.05 EUR**



The device cooperates with video doorphones, and other panels working in Hikvision IP standard.

SPECIFICATION

Sensor:	1.3 Mpx CMOS
LED illuminator:	—
IR illuminator:	✓
Compatibility:	Hikvision IP Video Doorphones
proximity reader built-in:	Access control cards - 13.56 MHz S50
UTP category:	UTP cat. 5e
Alarm inputs:	4 pcs
Relay outputs:	1 pcs NO/NC
RS-485:	✓
Ethernet:	1 x RJ-45 - 10/100 Base-T
Main features:	• 2 x Doorbell button, • Bidirectional communication, • Microphone built-in, • Speakers built-in, • Tamper detection - removing from mounting surface, • Ability to work with reed switch and signalling the door being opened too long
Operation temp:	-40 °C ... 70 °C
Power supply:	• 12 V DC / 1 A, • 24 V PoE
Housing:	Aluminum / Plastic, Waterproof
"Index of Protection":	IP65

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Color:	Silver
Weight:	0.52 kg
Dimensions:	182 x 100 x 33 mm
Supported languages:	English, Polish, Serbian, Hungarian
Manufacturer / Brand:	Hikvision
SAP Code:	305300109
Guarantee:	3 years

PRESENTATION

Front view:



Rear view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Connectors view:



Connectors description:

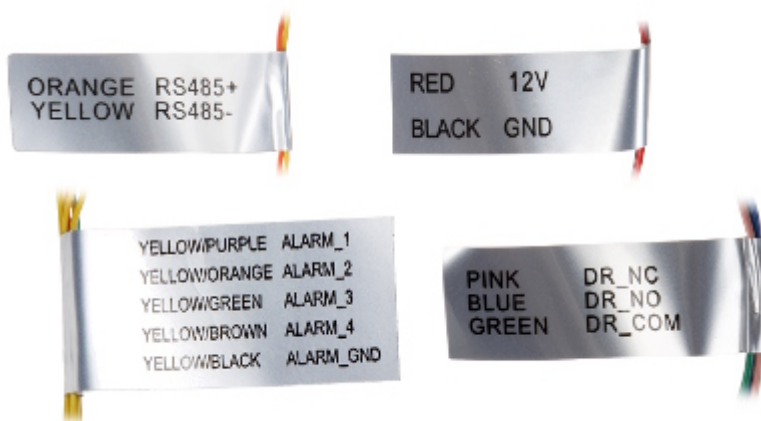

Examples of connection diagrams:

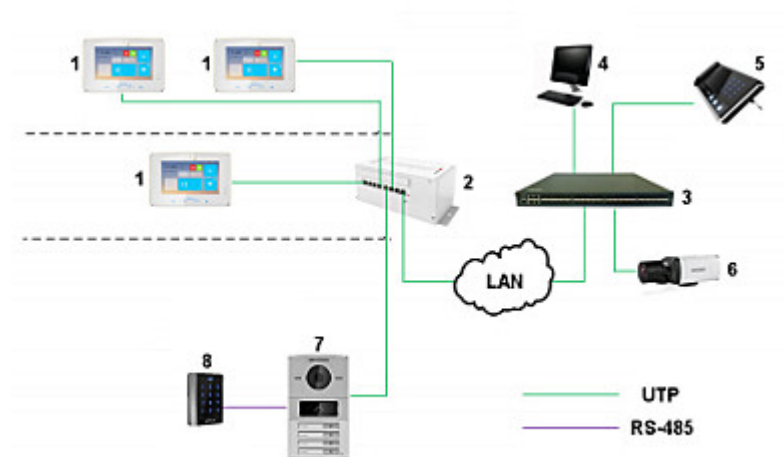

1. INDOOR PANEL
2. Switch dedicated to intercom systems
3. Switch
4. Remote client
5. System management center

- 6. IP cameras
 - 7. Video doorphone
 - 8. Reader with keypad
- In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

