

Code: DS-KD8102-V

VIDEO DOORPHONE **DS-KD8102-V** Hikvision

Net: **405.33 EUR** Gross: **405.33 EUR**



Video Doorphone is mounted in a flush-mounted housing.

The product has been equipped with a network interface, so it can be combined with systems based on the **iVMS-4200** software.

SPECIFICATION

Sensor:	1.3 Mpx CMOS
Display:	3.5 " TFT LCD, 480 x 320 px
Image compression method:	H.264
LED illuminator:	✓
IR illuminator:	—
Compatibility:	Hikvision IP Video Doorphones
RS-485:	✓
Ethernet:	10/100/1000 Base-TX
UTP category:	UTP cat. 5e
Door opening sensor:	4 pcs



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Main features:	• 13.56 MHz S50 proximity reader built-in, 2500 indexed users, • Wiegand interface, • Touch control keys, • LCD display, • Bidirectional communication, • Microphone built-in, • Speakers built-in, • Tamper detection - removing from mounting surface, • Auto-uploads alarm messages to Master or client station after entering the duress code to open the door, • Alarm inputs / outputs : 4 / 2, • Ability to work with reed switch and signalling the door being opened too long, • Auto-uploads captured pictures to FTP or the client, • Port USB 2.0, • Configuration possibility from PC - iVMS-4200 application • Default administrator password : 123456
Operation temp:	-40 °C ... 60 °C
Power supply:	12 V DC / 1.25 A
Power consumption:	≤ 15 W
Housing:	Plastic + Metal
Color:	Black
Weight:	1.97 kg
Dimensions:	418 x 145 x 61 mm
Supported languages:	Polish, English, Czech, French, Spanish, Dutch, German, Portuguese, Russian
Manufacturer / Brand:	Hikvision
SAP Code:	305300088
Guarantee:	3 years

PRESENTATION

Front panel:



Rear view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




View after remove the cover:




Connectors view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

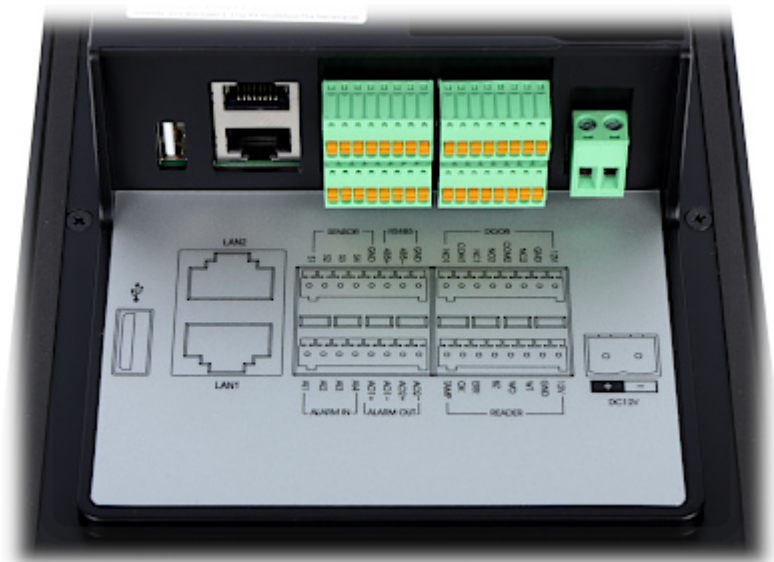

Example of application:

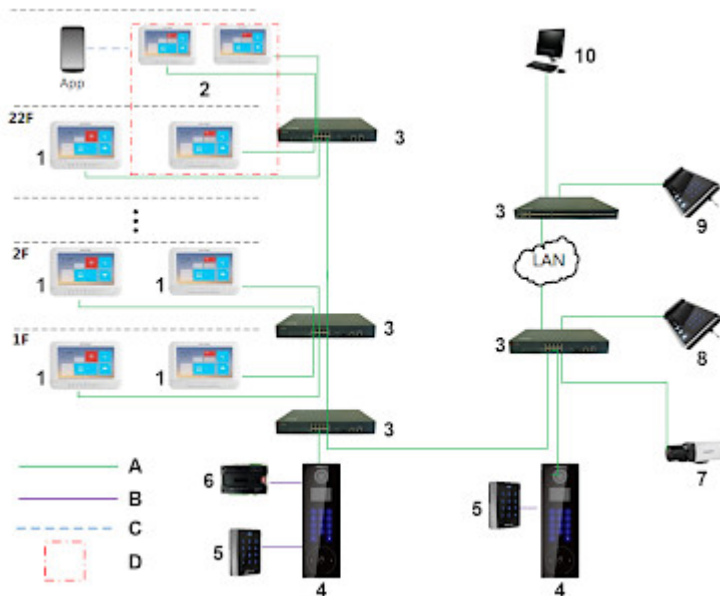

- A UTP cat. 5e/6
 B RS-485
 C Wi-Fi
 D Single resident
1. Resident panel
 2. Single resident panels
 3. Switch
 4. DS-KD8102-V
 5. Reader with keypad
 6. Elevator driver
 7. IP Camera
 8. System management from guarding room
 9. System management center
 10. Client software
- In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------