

Code: DS-KD-KP

KEYBOARD MODULE **DS-KD-KP** Hikvision

Net: **113.48 EUR** Gross: **139.58 EUR**



The DS-KD-KP module is designed to work with the DS-KD8003-IME1 or DS-KD8003-IME2 video doorphone module.

Installation of DS-KD-xx series modules takes place in dedicated DS-KD-ACF series housings (flush-mounted housings) and DS-KD-ACW series housings (surface-mounted housings). The masking frames attached to the housings of both series are made of aluminum.

SPECIFICATION

| | |
|--------------------------------|---|
| Compatibility: | DS-KD8003-IME1, DS-KD8003-IME2 |
| Main features: | <ul style="list-style-type: none">• Large, readable buttons,• Keypad backlight buttons |
| Operation temp: | -40 °C ... 60 °C |
| Permissible relative humidity: | 10 ... 95 % (non-condensing) |
| Power supply: | Supplied by DS-KD8003-IME1 or DS-KD8003-IME2 |
| Power consumption: | ≤ 2 W |
| Housing: | Aluminum + Plastic, Waterproof |
| Color: | Silver |
| "Index of Protection": | IP65 |
| IK rating: | IK07 |
| Weight: | 0.27 kg |
| Dimensions: | 100 x 98 x 34 mm |
| Manufacturer / Brand: | Hikvision |
| SAP Code: | 305301207 |
| Guarantee: | 3 years |

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Front panel:




Rear view:



Connectors view:



Example of application:

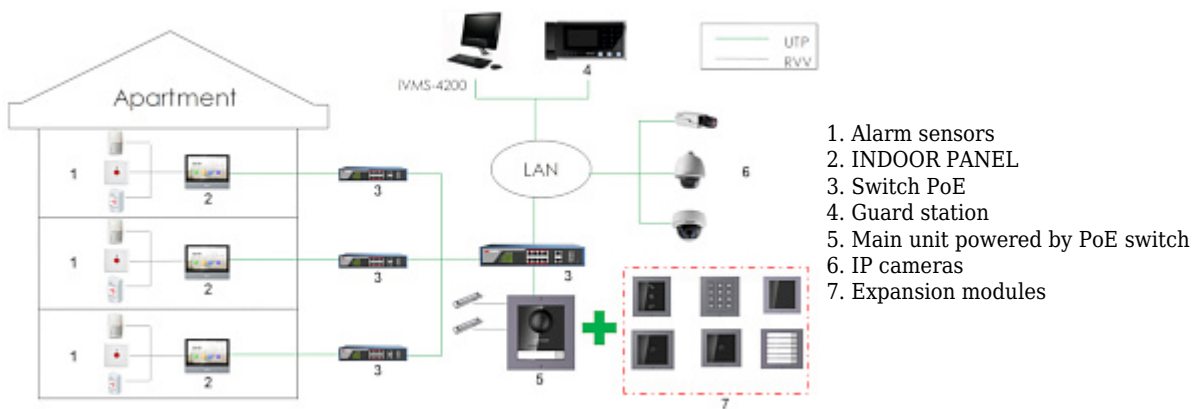

1. Alarm sensors
2. INDOOR PANEL
3. Switch PoE
4. Guard station
5. Main unit powered by PoE switch
6. IP cameras
7. Expansion modules