

Code: DS-KH6351-WTE1

INDOOR PANEL Wi-Fi / IP **DS-KH6351-WTE1** Hikvision

Net: **320.45 EUR** Gross: **320.45 EUR**

The DS-KH6351-WTE1 panel has been designed to create a simple and effective system of local communication.

The device is dedicated to work with Hikvision IP video doorphones. It can be also used as simple alarm control panel, or notification module by the support 8 alarm inputs.

The device is fully configurable via the **iVMS4200** software. In addition, the device has the ability to work with the **Hik-Connect** application on mobile devices.



SPECIFICATION

Compatibility:	Hikvision IP Video Doorphones
Shield:	7 " - capacitive touch screen
Resolution:	1024 x 600
Internal memory:	128 MB (built-in)
Main features:	• Wi-Fi module - IEEE 802.11 b/g/n, • Microphone built-in, • Speakers built-in, • Bidirectional communication, • Noise and echo reduction • Smooth adjustment of monitor parameters: image brightness, ring tone volume and conversation volume, • Automatically capture and save photos if there is no response to the bell button, • IP Hikvision cameras support - max. 16, • The ability of direct communication between two or more panels • Support up to 17 door stations • Register a short voice message if there is no response to the bell button • Support for capturing a photo during video calls • The microSD cards support max. 128 GB (not included) • The device is fully configurable via the iVMS4200 software. • In addition, the device has the ability to work with the Hik-Connect application on mobile devices • Remote unlocking using client software or a mobile client
Controlling:	capacitive touch screen
Default administrator password:	— The administrator password should be set at the first start
Default password for securing the zone:	—
Alarm inputs:	8

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Alarm outputs:	2
Material:	Plastic (ABS) + Aluminum
Color:	Black
Power supply:	• 12 V DC, • IEEE 802.3af
Power consumption:	≤ 3 W
Operation temp:	-10 °C ... 50 °C
Weight:	0.35 kg
Dimensions:	180 x 123 x 21 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, French, Greek, Spanish, Dutch, German, Portuguese, Russian, Romanian, Serbian, Turkish, Hungarian, Ukrainian, Vietnamese, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	305303851
Guarantee:	3 years

PRESENTATION

Front view:




Rear view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Device connectors:

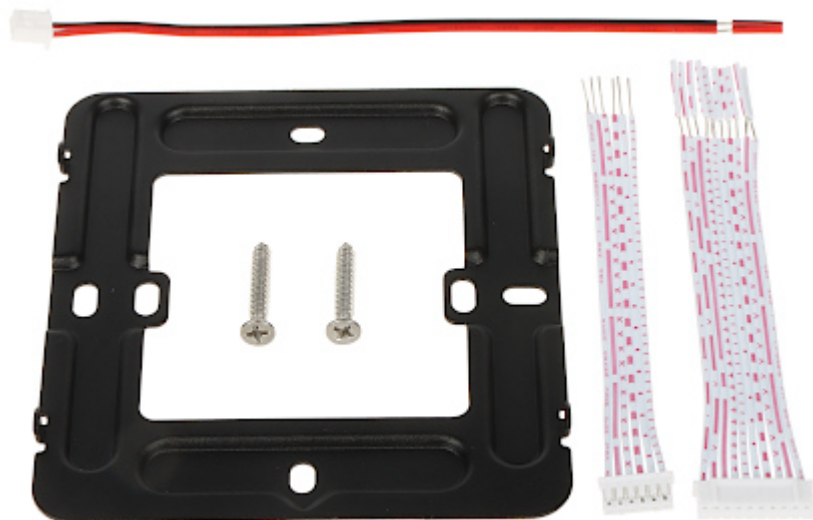

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

