

Code: DS-KIS701-B-D

VIDEO DOORPHONE KIT **DS-KIS701-B-D** Hikvision

Net: **523.82 EUR** Gross: **523.82 EUR**

Two-wire HIKVISION video doorphones system with 7" touch monitor and controller enabling connection and supply of up to 9 groups of devices. Video Doorphone is mounted in a flush-mounted housing.

The device has the ability to work with the [Hik-Connect](#) application for mobile devices.

The attached DS-KAD709 controller also enables the connection of the video doorphone system to the LAN network and via it to the Internet.



SPECIFICATION

Sensor:	2.1 Mpx CMOS
Image compression method:	H.264
LED illuminator:	—
IR illuminator:	✓
Compatibility:	HIKVISION 2-wire Video Doorphones
Main features:	• Doorbell button, • Bidirectional communication, • Microphone built-in, • Speakers built-in, • Tamper detection - removing from mounting surface, • LEDs for system state indication and user interface display, • Door contact and request button for exit inputs, • The device has the ability to work with the Hik-Connect application for mobile devices, • Relay output NO/NC
Operation temp:	-30 °C ... 60 °C
Power supply:	24 V DC - via DS-KAD709
Housing:	Metal, Waterproof
Color:	Silver
"Index of Protection":	IP65
Weight:	0.79
Dimensions:	169 x 110 x 52

INDOOR PANEL:

Shield:	7 " - capacitive touch screen
Resolution:	1024 x 600
Internal memory:	—
Memory card slot:	Micro SD memory cards up to 32GB support (possible local recording)
Mobile phones support:	• Android: Free application Hik-Connect • iOS (iPhone): Free application Hik-Connect
Default administrator password:	888999

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Main features:	• Microphone built-in, • Speakers built-in, • Bidirectional communication, • Smooth adjustment of monitor parameters: image brightness, ring tone volume and conversation volume, • Automatically capture and save images if there is no response to the doorbell, • Support for capturing a photo during video calls, • Register a short voice message if there is no response to the bell button, • Full support via network, • LEDs for system state indication and user interface display, • Possibility to connect up to 3 compatible devices (door stations, internal panels, KAD-709 controller), • IP Hikvision cameras support
Controlling:	One-touch action buttons + capacitive touch screen
Alarm inputs:	—
Power supply:	24 V DC - via DS-KAD709
Color:	Black
Weight:	0.512 kg
Dimensions:	196 x 133 x 21 mm

ENCLOSURE:

Housing type:	Flush-mounted
Material:	Metal
Color:	Black
Internal dimensions:	160 x 101 x 37 mm
External dimensions:	162 x 103 x 38 mm

Controller:

Network interface:	RJ45 - 10/100 Base-T
Number of supported devices:	max. 9 pcs
Device powering:	✓
Power supply:	24 V DC (power adapter included)
Housing:	Plastic, DIN, TS-35 rail mounting
Color:	White
Weight:	0.20
Dimensions:	110 x 112 x 66

General information:

Supported languages:	Polish, English, Czech, French, Spanish, Dutch, German, Romanian, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	305301532
Guarantee:	3 years

PRESENTATION

INDOOR PANEL:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Mounting side view:



Connectors:

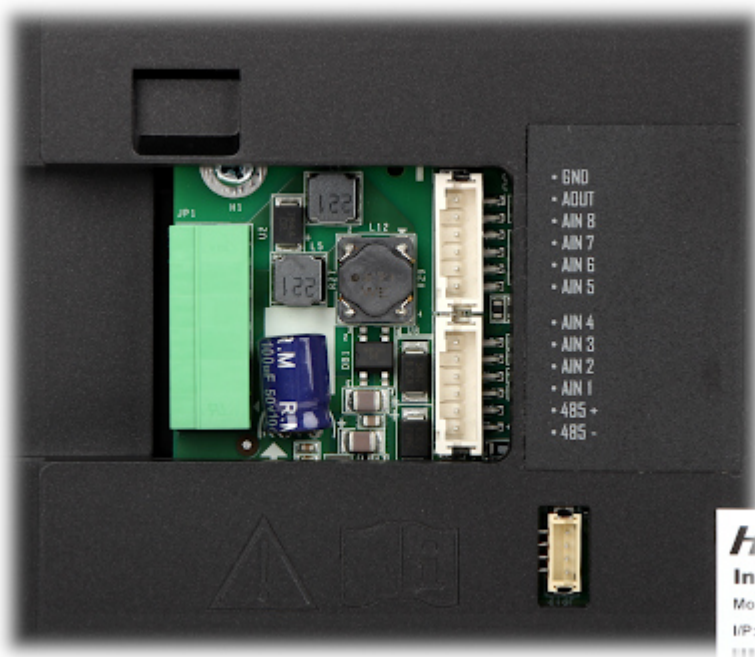

Memory card slot:



Video doorphone:



Mounting side view:




Connectors:



Controller:



Mounting side view:

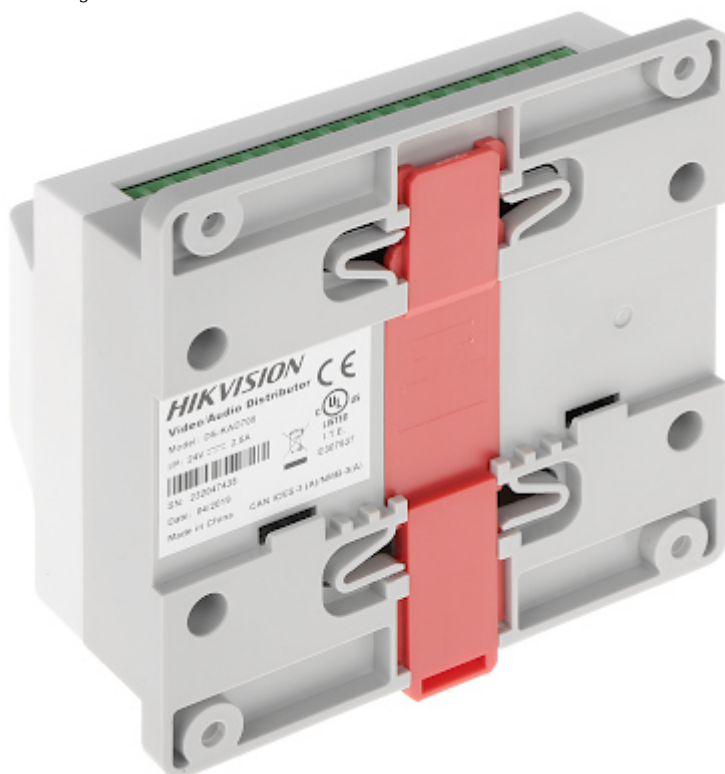

Connectors:



Power adapter:




Mounting side view:



Connectors:



Examples of connection diagrams:

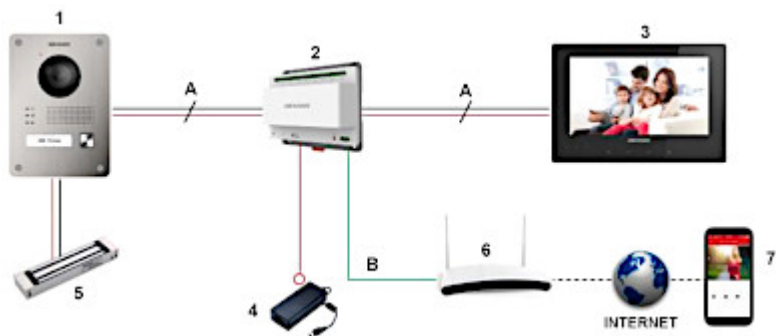

1. Video doorphone
 2. Controller
 3. INDOOR PANEL
 4. 24V DC power adapter
 5. Electromagnetic Lock
 6. Router
 7. Remote client
- A 1-pair cable
B UTP cat. 5
In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------