

Code: DS-KIS602

## VIDEO DOORPHONE KIT **DS-KIS602** Hikvision

Net: **549.45 EUR** Gross: **549.45 EUR**

HIKVISION video doorphone set with 7" touch monitor and with the possibility of integration with both the alarm system and video monitoring. Video Doorphone is mounted in a surface housing.

**Attention!** To ensure proper operation, the "Extend" switch of the switch included in the set should be in the "Off" position.



### SPECIFICATION

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Compatibility:            | IP Hikvision video doorphones II generation                                                                                                                                                                                                                                                                                                                                                                                                       |
| Doorbell button:          | 1 pcs                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Sensor:                   | 2.1 Mpx CMOS                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Camera resolution:        | 1920 x 1080 - 1080p                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Camera view angle:        | 180 °                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Image compression method: | H.264                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| IR illuminator:           | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Ethernet:                 | 10/100 Mb/s                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Network protocols:        | TCP/IP, RTSP                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Alarm inputs:             | 4 pcs                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Relay outputs:            | 2 x NO/NC                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Main features:            | <ul style="list-style-type: none"><li>• Bidirectional communication,</li><li>• Microphone built-in,</li><li>• Speakers built-in,</li><li>• Noise suppression and echo cancellation,</li><li>• Tamper detection - removing from mounting surface,</li><li>• Installation of DS-KD-xx series modules takes place in dedicated DS-KD-ACF series housings (flush-mounted housings) and DS-KD-ACW series housings (surface-mounted housings)</li></ul> |
| Power supply:             | <ul style="list-style-type: none"><li>• PoE (802.3af),</li><li>• 12 V DC</li></ul>                                                                                                                                                                                                                                                                                                                                                                |
| Power consumption:        | ≤ 10 W                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Operation temp:           | -40 °C ... 60 °C                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Housing:                  | Metal                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Color:                    | Black                                                                                                                                                                                                                                                                                                                                                                                                                                             |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                        |                  |
|------------------------|------------------|
| "Index of Protection": | IP65             |
| Weight:                | 0.38 kg          |
| Dimensions:            | 100 x 98 x 44 mm |

#### INDOOR PANEL:

|                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Compatibility:                          | IP Hikvision modular video doorphones                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Shield:                                 | 7 " - capacitive touch screen                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Resolution:                             | 1024 x 600                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Internal memory:                        | 128 MB (built-in)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Main features:                          | <ul style="list-style-type: none"> <li>• Wi-Fi module - IEEE 802.11 b/g/n,</li> <li>• Microphone built-in,</li> <li>• Speakers built-in,</li> <li>• Bidirectional communication,</li> <li>• Smooth adjustment of monitor parameters: image brightness, ring tone volume and conversation volume,</li> <li>• Automatically capture and save photos if there is no response to the bell button,</li> <li>• IP Hikvision cameras support,</li> <li>• The ability of direct communication between two or more panels,</li> <li>• Register a short voice message if there is no response to the bell button</li> <li>• Support for capturing a photo during video calls</li> <li>• The microSD cards support max. 32 GB, 16 GB included</li> <li>• The device is fully configurable via the <b>iVMS4200</b> software.</li> <li>• In addition, the device has the ability to work with the <b>Hik-Connect</b> application on mobile devices</li> </ul> |
| Controlling:                            | capacitive touch screen                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Default administrator password:         | —<br>The administrator password should be set at the first start                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Default password for securing the zone: | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Alarm inputs:                           | 8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Alarm outputs:                          | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Power supply:                           | <ul style="list-style-type: none"> <li>• PoE (802.3af),</li> <li>• 12 V DC</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Power consumption:                      | ≤ 6 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Color:                                  | Black + Silver                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Operation temp:                         | -10 °C ... 55 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Weight:                                 | 0.36 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Dimensions:                             | 200 x 140 x 25 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

#### ENCLOSURE:

|                            |                   |
|----------------------------|-------------------|
| Number of mounted modules: | 1 pcs             |
| Material:                  | Aluminum          |
| Color:                     | Graphite          |
| Weight:                    | 0.32 kg           |
| External dimensions:       | 117 x 107 x 37 mm |

#### SWITCH :

|                     |                                                                                                                                      |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Standards:          | IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3af                                                                                   |
| LAN ports:          | <ul style="list-style-type: none"> <li>• 1 x RJ45 100 Base-T - Uplink,</li> <li>• 4 x 10/100 Base-T ( 4 x PoE (802.3af) )</li> </ul> |
| LED diodes:         | Power, PoE, Link/Act                                                                                                                 |
| Transmission speed: | 10 / 100 Mbps : 1 Port LAN + 4 LAN & PoE ports                                                                                       |
| Management:         | —                                                                                                                                    |




|                       |                                                                                                                                                                          |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximal output power: | 15 W / port PoE                                                                                                                                                          |
| Maximal total power:  | 38 W                                                                                                                                                                     |
| MAC addresses table:  | 1k - Auto update of MAC addresses table                                                                                                                                  |
| Operation modes:      | <ul style="list-style-type: none"> <li>• Extend On : 250 m, 10 Mbps @ UTP cat. 5e, 6 - 1 ... 4 ports</li> <li>• Extend Off : 100 m, 100 Mbps @ UTP cat. 5e, 6</li> </ul> |
| Operation temp:       | 0 °C ... 40 °C                                                                                                                                                           |
| Power supply:         | 48 V DC / 800 mA (power adapter included)                                                                                                                                |
| Weight:               | 0.2 kg                                                                                                                                                                   |
| Dimensions:           | 132 x 95 x 28 mm                                                                                                                                                         |

#### General information:

|                       |                                                                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Supported languages:  | Polish, English, Bulgarian, Croatian, Czech, French, Greek, Spanish, Dutch, German, Portuguese, Romanian, Serbian, Hungarian, Italian |
| Manufacturer / Brand: | Hikvision                                                                                                                             |
| SAP Code:             | 305301627                                                                                                                             |
| Guarantee:            | <b>3 years</b>                                                                                                                        |

## PRESENTATION

#### INDOOR PANEL:

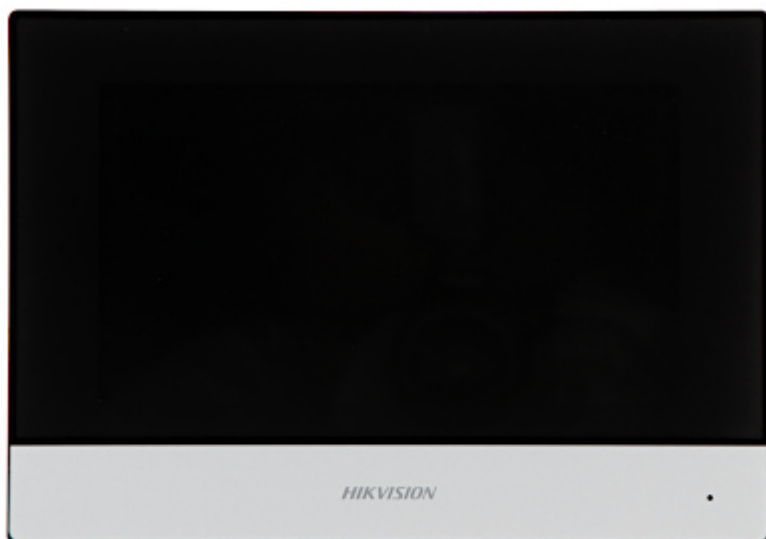

Mounting side view:





Connectors:





Memory card slot:



VIDEO DOORPHONE:



Mounting side view:




Connectors:



SWITCH :



Connectors:

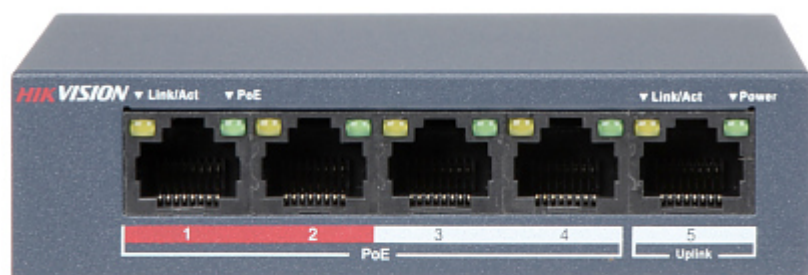



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

