

Code: APTI-W21H1-TUYA

IP CAMERA **APTI-W21H1-TUYA** Wi-Fi - 1080p 3.6 mm

Net: **43.58 EUR** Gross: **43.58 EUR**

The cameras cooperating with the user-friendly Tuya platform have been designed with special care to simplify the configuration process and enable the user to create a simple and effective monitoring system.

Very easy operation via mobile devices (Android / iOS), allows the users for comfortable and remote operation, and also management of the camera. The Wi-Fi module used in the device allows the device to operate also in places with limited wiring possibilities.

Attention! Camera for indoor use only. Devices cooperating with the Tuya platform do not have a WEB interface. The camera works only with the mobile application (the camera does not work with recorders). Controlling the device and schedule settings is possible if the device has access to the Internet.



SPECIFICATION

Standard:	TCP/IP
Sensor:	Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p
Lens:	3.6 mm
View angle:	• 135 ° (manufacturer data) • 104 ° (our tests result)
Range of IR illumination:	10 m
Audio:	• Microphone built-in, • Speaker built-in, • Audio transmission via network, • Bi-directional audio streaming support
Image compression method:	H.265
Network protocols:	TCP/IP
Network interface:	Wi-Fi - IEEE 802.11 b/g/n
ONVIF:	—
WEB Server:	—
Mobile phones support:	Access by a cloud (P2P) • The Tuya Smart free application on Android • The Tuya Smart free application on iOS
Default IP address:	DHCP

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Web browser access ports:	—
PC client access ports:	—
Mobile client access ports:	—
Port ONVIF:	—
RTSP URL:	—
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Main features:	• Wi-Fi module - IEEE 802.11 b/g/n, • Motion Detection - Built-in PIR detector • Day/night mode • ICR - Movable InfraRed filter • Mirror - Mirror image • Sound signaling, • Video PUSH personal messaging • Access by a cloud (P2P) • micro USB socket • RESET button
Power supply:	• From built-in battery : 1000 mAh, • 5 V DC (power adapter not included) or USB
Power consumption:	≤ 2 W
Housing:	Plastic
"Index of Protection":	—
Weight:	0.05 kg
Dimensions:	• 47 x 46 x 41 mm - Camera • Ø 35 31 mm - Bracket • 1.1 m (cable length)
Operation temp:	-10 °C ... 55 °C
Supported languages:	English
Manufacturer / Brand:	APTI
Guarantee:	2 years

PRESENTATION

Small dimensions camera:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Top view:



The microSD socket and camera switch:





RESET button:



micro USB connector:






Rear view:



In the kit:



Sample interface screenshot:

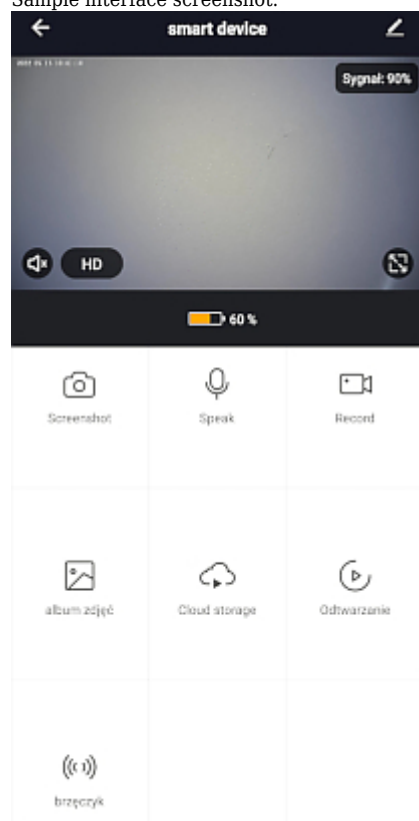

OUR TESTS

Camera image at artificial illumination (about 30Lux):



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



- Small dimensions of the camera.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60