

Code: IPC-C27W-BAT

IP CAMERA **IPC-C27W-BAT** Wi-Fi - 1080p 2.8 mm

Net: **72.65 EUR** Gross: **72.65 EUR**

The wireless IP camera allows you to record events on a micro SD card after motion is detected by the built-in PIR detector. The device allows you to save data to the cloud and remotely access them. Built-in lithium battery Li-Ion enables operation for a period of 6 months in places where there is no possibility of connecting cables.

Camera is according to IP66 Index of Protection norm.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.9 " CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p
Lens:	2.8 mm / F2.0
View angle:	• 110 ° (manufacturer data) • 102 ° (our tests result)
IR illuminator:	✓
Min. illumination:	0.01 Lux (color) 0.01 Lux (B/W)
RS-485 interface:	—
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Image compression method:	H.265 / H.264
ONVIF:	—
Alarm inputs / outputs:	—
Audio:	• Microphone • Speaker • Bi-directional audio streaming support • Noise reduction
Network interface:	2.4 GHz Wi-Fi - IEEE 802.11 b/g/n

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Mobile phones support:	• Android: Free application VicoHome • iOS (iPhone): Free application VicoHome
Default IP address:	—
Default user password:	—
Web browser access ports:	—
PC client access ports:	—
Main features:	• The device supports the cloud, which is also possible to access from the smartphone using the application • Built-in PIR detector - Motion detection recording, • Receive alarm notifications in the application when the camera detects motion, • Alarm signaling via LED and/or siren (it is possible to manually start the alarm) • Video recording to micro SD card with playback possibility • IR illuminator • ICR - Movable InfraRed filter • Live image view • Software update via network • RESET button, • Intelligent Image Analysis : Intelligent object recognition in the field of view (human / animal), area detection, package inspection
Power supply:	• Li-Ion battery - 4 V, 5200 mAh, • Charging via micro USB port - 5 V / 1.5 A (power adapter not included)
Current consumption:	• 0.42 mA Standby • 220 / 550 mA Operation - Day/night mode
Backup time:	6 months
Charging time (recover to 100% capacity):	8 ... 10 h
Housing:	Plastic
Color:	White + Black
"Index of Protection":	IP66
Vandal-proof:	—
Operation temp:	-10 °C ... 45 °C
Weight:	• 0.22 kg (without bracket) • 0.26 kg (with bracket)
Dimensions:	• 89 x 59 x 58 mm (without bracket) • 89 x 59 x 151 mm (with bracket)
Guarantee:	2 years

PRESENTATION

Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Bottom view:




Mounting side view:



Bracket with mounted camera:



The device has the ability to work with the VicoHome application for mobile devices:

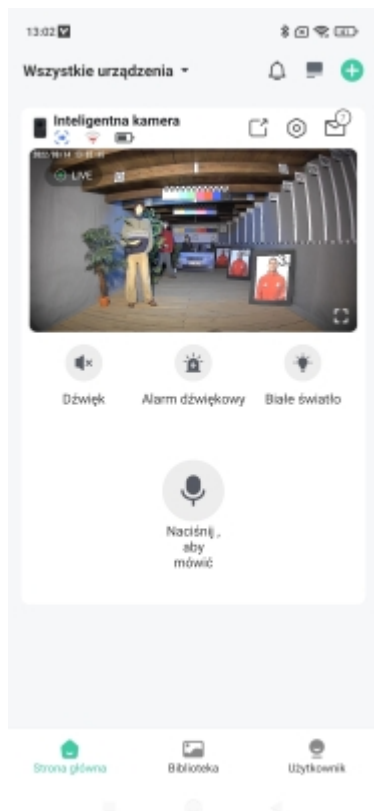

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------