

Code: RBCAP2ND

ACCESS POINT **RBCAP2ND** cAP 2.4 GHz 300 Mbps MIKROTIK

Net: **55.16 EUR** Gross: **55.16 EUR**

The RBCAP2ND access point broadcasts the Wi-Fi 4 generation wireless network in the 2.4 GHz band.

The device is easy to use and manage.



SPECIFICATION

Frequency range:	2.4 GHz
Antenna type:	2 x Internal antenna
Standards:	• IEEE 802.11b, • IEEE 802.11g, • IEEE 802.11n
Baud rates:	300 Mbps
LAN ports:	1 x 10/100 Mbps
Receiver sensitivity:	• 1M : -96 dBm • 11M : -89 dBm • 6M : -93 dBm • 54M : -74 dBm • MCS0 : -93 • MCS7 : -71
Transmitter power:	22 dBm (max)
Operating system:	MikroTik RouterOS
Power supply PoE:	PoE (802.3af/at) / Passive PoE
Power supply:	• PoE (802.3at), • Passive PoE : 11 ... 57 V DC • 24 V / 0.2 mA (power adapter included) - via external PoE stabilizer (included)
Power consumption:	4 W
Main features:	• Possibility to mount on the wall or ceiling • Mode button

Operation temp:	-40 °C ... 70 °C
Permissible relative humidity:	5 % ... 95 %
Weight:	0.24 kg
Dimensions:	Ø 165 x 28 mm
Manufacturer / Brand:	MikroTik
Guarantee:	2 years

PRESENTATION

Bottom view:



Mounting side view:




connector:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



In the kit:

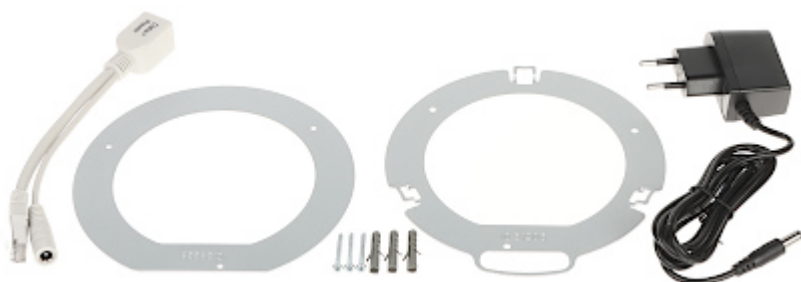

OUR OPINIONS



- Modern and ergonomic design.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60