

Code: RG-AP180

ACCESS POINT **RG-AP180** Wi-Fi 6, 2.4 GHz, 5 GHz, 547 Mbps + 1201 Mbps REYEE

Net: **227.86 EUR** Gross: **227.86 EUR**

The RG-AP180 access point broadcasts 2 separate wireless networks in the 5 GHz band with speed 1201 Mb/s and in the 2.4 GHz band with speed 574 Mb/s. Simple tasks such as sending e-mails or web browsing can be handled by the 2.4 GHz band while bandwidth intensive tasks like online gaming or HD video streaming can be processed by the 5 GHz band - all at the same time.

The device is widely used in computer networks in offices (SOHO) and Small-to-Medium Businesses (SMB). The design of the device enables easy wall mounting in a standard junction box.

Supports 802.11ax standard - the next generation of Wi-Fi.

Access Point is managed through the web and the cloud (Ruijie Reyee application).

Attention! The QR code is located under the faceplate.



SPECIFICATION

Frequency range:	• 2.4 GHz (2.4 ... 2.4835 GHz), • 5 GHz (5.150 ... 5.250, 5.250 ... 5.350, 5.470 ... 5.725, 5.725 ... 5.850 GHz) ,
Antenna type:	• 2x2 MU-MIMO - built-in • 5 dBi @ 2.4 GHz - 2 pcs • 5 dBi @ 5 GHz - 2 pcs
Standards:	• IEEE 802.11 b/g/n/ax @ 2.4 GHz, • IEEE 802.11 a/n/ac/ax @ 5 GHz
Baud rates:	547 Mbps @ 2.4 GHz + 1201 Mbps @ 5 GHz
LAN ports:	• 4 x 10 / 100 / 1000 Mbps - RJ45, • 1 x 10 / 100 / 1000 Mbps Uplink + PoE IN - RJ45
Port USB:	micro USB - Console
LED indicators:	Power / System
DDNS:	—
DHCP server:	✓
Firmware update:	✓


Protections:	• WEP 64/128-bit, WPA-TKIP, WPA-PSK, WPA2 AES, WPA3 • IEEE 802.1x and Radius Authentication • Black list • Access Control List - ACL package filtering based on source and destination MAC addresses • CPP • NFPP • SSID hiding
Operation modes:	Access Point
Management interface:	• Ruijie Cloud Central Management System • Configuration using the Ruijie Reyee application • Remote management • Web browser • Console - via micro USB port
Mobile phones support:	Android: Free application Ruijie Reyee iOS (iPhone): Free application Ruijie Reyee
Default IP address:	192.168.110.1
Transmitter power:	max. 20 dBm @ 2.4 GHz max. 20 dBm @ 5 GHz
Main features:	• Wi-Fi 6 support - a standard that offers higher speeds, better performance in high-traffic environments • OFDMA • MU-MIMO - a multi-antenna transmission function that allows to increase the bandwidth and reliability of connection with the client of the network • Load balance • WLAN : 16 x BSSID - max 8 BSSID addresses for each band • Multicast • IPv4/IPv6 - Static routing • VPN support : IPsec, PPPoE • NTP, SNTP, SNMPv1/v2c/v3(MIB-2) • Statistical Reporting, System logs • DHCP client • Bluetooth 5.0 interface • RESET button
Housing:	Plastic
Power supply PoE:	PoE (802.3af/at)
Power supply:	• 12 V DC / 1 A (not included) • PoE / PoE+
Power consumption:	max. 10 W
Operation temp:	-10 °C ... 50 °C
Permissible relative humidity:	5 % ... 95 % (non-condensing)
Weight:	0.22 kg
Dimensions:	116 x 86 x 43 mm
Manufacturer / Brand:	RUIJIE / REYEE
Guarantee:	3 years

PRESENTATION

Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

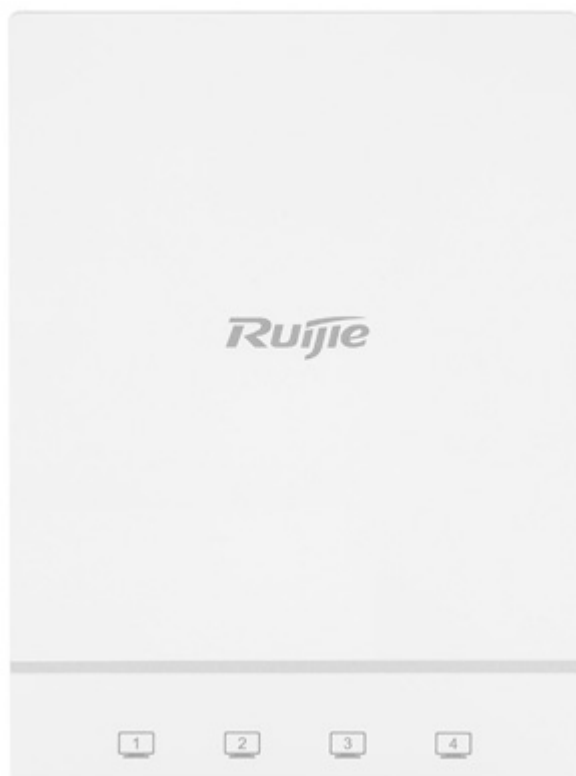


Rear view:





Device connectors:

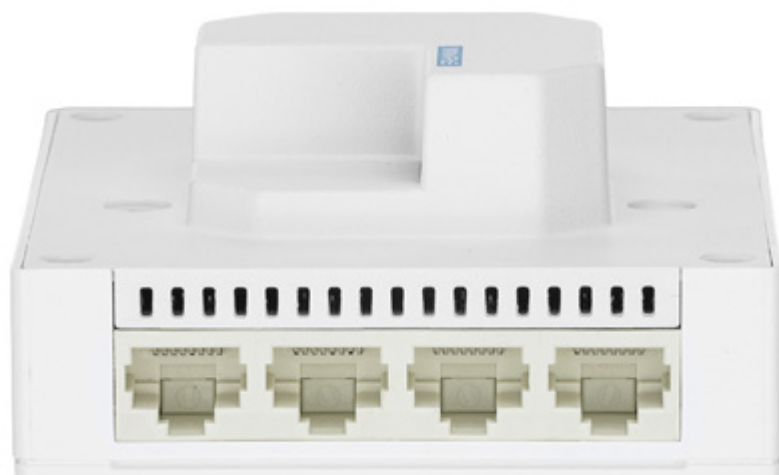



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

