

Code: RG-RAP2200(F)

ACCESS POINT **RG-RAP2200(F)** 2.4 GHz 5 GHz 400 Mbps + 867 Mbps REYEE

Net: **98.76 EUR** Gross: **98.76 EUR**

The RG-RAP2200(F) access point broadcasts 2 separate wireless networks in the 5 GHz band with speed 867 Mb/s and in the 2.4 GHz band with speed 400 Mb/s. The Reyee RG-RAP2200(F) is a device working in 2x2 MIMO (Multiple Input Multiple Output) standard.

The device is easy to use and manage.



SPECIFICATION

Frequency range:	2.4 GHz (2.400 ... 2.435 GHz) 5 GHz (5.150 ... 5.850 GHz)
Antenna type:	2x2 MIMO, 2.4 GHz / 5.0 GHz - 2 dBi, Integrated - 2 x Omnidirectional antenna
Standards:	IEEE 802.11 a/b/g/n/ac
Baud rates:	400 Mbps + 867 Mbps
Protections:	WPA-TKIP, WPA2 AES, WPA-PSK
LAN ports:	2 x 10/100 Mbps
Mobile phones support:	Android: Free application Ruijie Reyee iOS (iPhone): Free application Ruijie Reyee
Transmitter power:	• 20 dBm @ 2.4 GHz (max) • 20 dBm @ 5.0 GHz (max)
Power supply PoE:	PoE (802.3af/at)
Power supply:	12 V / 1.5 A (power adapter not included)
Power consumption:	≤ 12.95 W
Main features:	• Possibility to mount on the wall or ceiling • Number of users : 110 (max) • AP placement and RF maps • Easy and uniform management system for many devices • Intuitive installation and configuration of many advanced functions
Operation temp:	0 °C ... 40 °C

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Permissible relative humidity:	5 % ... 95 %
Weight:	0.48 kg
Dimensions:	194 x 194 x 43 mm
Manufacturer / Brand:	RUIJIE / REYEE
Guarantee:	3 years

PRESENTATION


Mounting side view:



Connectors:



In the kit:

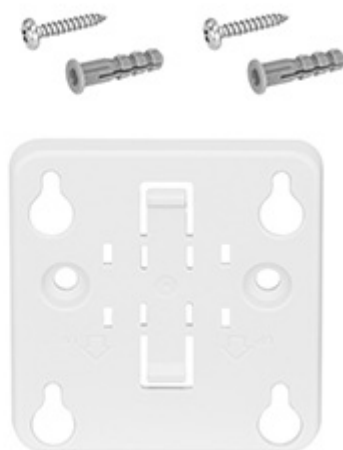

OUR OPINIONS



- Modern and ergonomic design.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

