

Code: YAP-2X0.5/200

CCTV CABLE YAP-2X0.5/200

Net: 0.72 EUR Gross: 0.72 EUR

CCTV specialized cable.

The cable complies with the CPR No. 305/2011 directive and meets the requirements of the PN-EN 50575 European standard which specifies requirements in fire conditions, test methods and rating of cables used as building material. The cable has a Declaration of Performance and a CE marking, which confirm its compliance with the guidelines of the CPR regulation.



SPECIFICATION


In section:	200 m Price for 1m when buying a whole roll
Coaxial cable:	YAP
Inner conductor:	Ø 0.59 mm Cu - Wire
Dielectric:	Ø 3.7 mm PE full
Shield:	—
Braid:	Wire Cu
Impedance:	75 Ω
Outer coating:	Ø 5.9 mm PVC
Cable attenuation at 100m section:	11.3 dB @ 100 MHz 16.3 dB @ 200 MHz 27.0 dB @ 500 MHz 40.6 dB @ 1000 MHz 57.2 dB @ 1750 MHz
Electrical cable:	
Inner conductor:	2 x 0.5 mm ² Stranded wire Cu
Power wires resistance:	4 Ω / 100 m
Guarantee:	2 years

PRESENTATION

Coaxial cable parameters:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

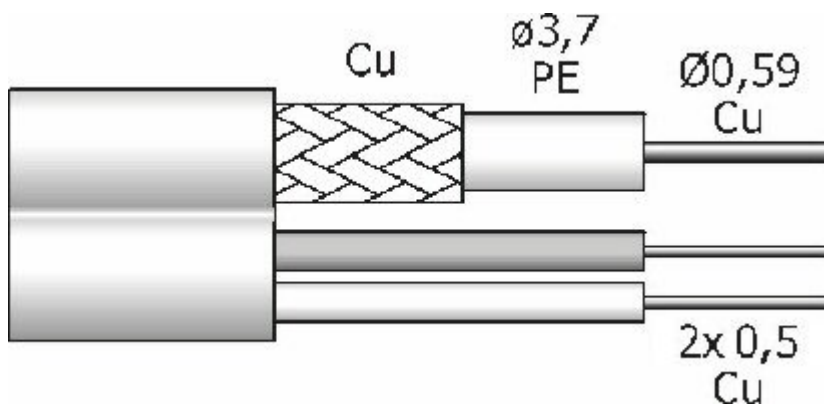

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------