

Code: ATLO-TSH1-TUYA

# SMART SWITCH WITH TEMPERATURE MEASUREMENT ATLO-TSH1-TUYA

## Wi-Fi, Tuya Smart

Net: 20.96 EUR Gross: 20.96 EUR

The ATLO-TSH1-TUYA Wi-Fi Smart Switch allows you to control the devices connected to it using the mobile application. For proper functioning of the device, it is necessary to connect it to the Wi-Fi network with Internet access.

Beyond direct control, the device has the ability to program the on and off schedule and linking to different system events. Voice control allows you to control the device via voice commands from Amazon Alexa or the Google Assistant (Internet access required).

Tuya is an international home automation platform that connects thousands of products made by different manufacturers. The system can support all the most popular communication protocols such as Wi-Fi, Zigbee, Bluetooth.

**Attention!** Schedule setting is possible if the device has Internet access.



### SPECIFICATION

|                                |                                                                                                                                                                                                                                                                                                                        |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application:                   | <ul style="list-style-type: none"><li>• Temperature measurement,</li><li>• switching devices on/off</li></ul>                                                                                                                                                                                                          |
| Power supply:                  | 90 ... 250 V                                                                                                                                                                                                                                                                                                           |
| Temperature measurement:       | -40 °C ... 80 °C ± 0.5 °C                                                                                                                                                                                                                                                                                              |
| Maximal total load:            | 3750 W                                                                                                                                                                                                                                                                                                                 |
| Total maximal current:         | 15 A                                                                                                                                                                                                                                                                                                                   |
| Number of inputs:              | 1                                                                                                                                                                                                                                                                                                                      |
| Number of outputs:             | 2                                                                                                                                                                                                                                                                                                                      |
| Connector type:                | screw terminals                                                                                                                                                                                                                                                                                                        |
| Wireless:                      | <ul style="list-style-type: none"><li>• Wi-Fi 2.4 GHz IEEE 802.11 b/g/n</li><li>• Bluetooth</li></ul>                                                                                                                                                                                                                  |
| Mobile phones support:         | <ul style="list-style-type: none"><li>• The <a href="#">Tuya Smart</a> free application on Android</li><li>• The <a href="#">Tuya Smart</a> free application on iOS</li></ul>                                                                                                                                          |
| Main features:                 | <ul style="list-style-type: none"><li>• Warning indication about exceeding the preset temperature,</li><li>• schedule,</li><li>• timer,</li><li>• remote access,</li><li>• voice control,</li><li>• Pairing button,</li><li>• Wi-Fi indicator,</li><li>• Temperature history graph,</li><li>• For indoor use</li></ul> |
| Housing:                       | Plastic                                                                                                                                                                                                                                                                                                                |
| Color:                         | White                                                                                                                                                                                                                                                                                                                  |
| Operation temp:                | 0 °C ... 40 °C                                                                                                                                                                                                                                                                                                         |
| Permissible relative humidity: | 0 % ... 90 % (non-condensing)                                                                                                                                                                                                                                                                                          |
| Weight:                        | 0.1 kg (total)                                                                                                                                                                                                                                                                                                         |
| Dimensions:                    | <ul style="list-style-type: none"><li>• 96 x 54 x 28 mm</li><li>• 95 cm (cable length) Probe</li></ul>                                                                                                                                                                                                                 |


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Guarantee:

2 years

## PRESENTATION


Top view:

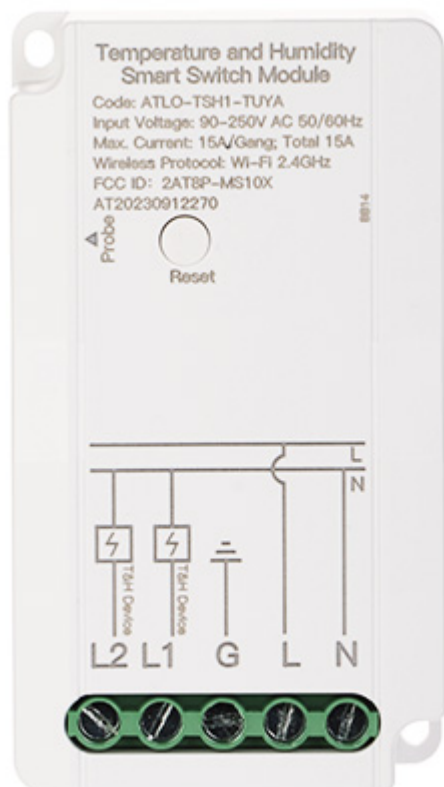

Connectors:



Side view:

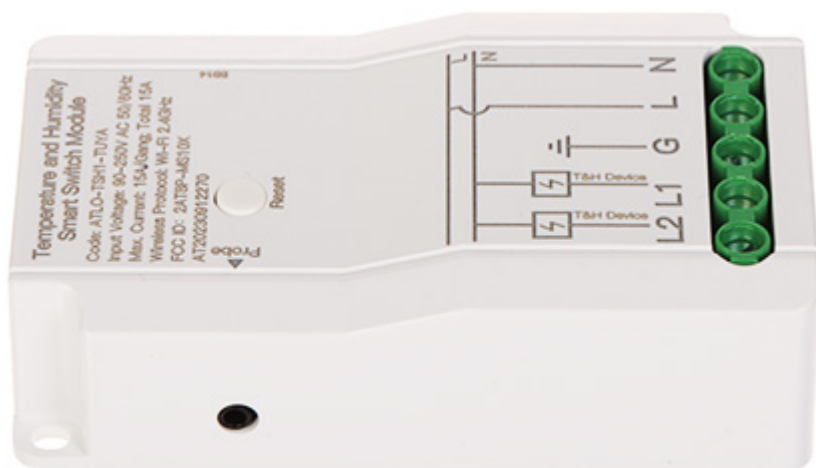

Sensor connector:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|