

Code: SHUTTERBOX-DIN/BLEBOX

# SMART CONTROLLER FOR ROLLER SHUTTERS **SHUTTERBOX-DIN/BLEBOX** Wi-Fi, 230 V AC


Net: **46.56 EUR** Gross: **46.56 EUR**

The SHUTTERBOX-DIN/BLEBOX controller enables remote control of the roller shutters with setting a desired stop position. It is also possible to control the percentage of slats opening in the facade shutters and to control the roof window, awning, overhead projector screen and even curtains. The SHUTTERBOX-DIN/BLEBOX device is designed to mount on DIN TS-35 rail.

To work with full functionality, the device requires connection to a home Wi-Fi network. Controlling BleBox devices via the cloud requires additionally connecting the home network to the Internet and enabling the "Remote access" function in the device configuration.

Beyond direct control, the device has the ability to program the opening and closing schedule and linking to different system events. Voice control allows you to control the device via voice commands from Amazon Alexa or the Google Assistant (Internet access required).

**Attention!** Controlling the device with a physical switch is done by shorting / opening the IN contact to the phase wire. The device can operate with monostable (momentary), bistable and stair switches.

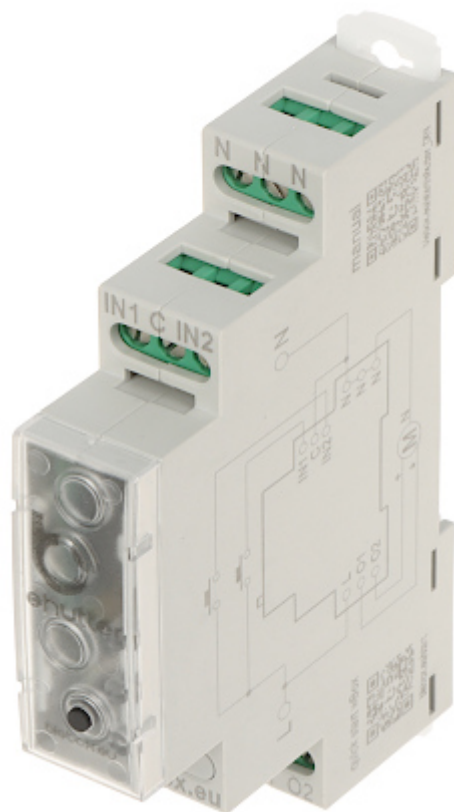

## SPECIFICATION

|                        |                                                                                                                                                                                                                                                                                                                             |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application:           | roller shutters, roof windows, awnings, drop-down screens, curtains                                                                                                                                                                                                                                                         |
| Rated voltage:         | 230 V AC                                                                                                                                                                                                                                                                                                                    |
| Maximal total load:    | 2 x 1150 W (resistance load) / 2 x 150 W (inductive or capacitive load)                                                                                                                                                                                                                                                     |
| Total maximal current: | 2 x 5 A                                                                                                                                                                                                                                                                                                                     |
| Number of inputs:      | 2                                                                                                                                                                                                                                                                                                                           |
| Number of outputs:     | 2                                                                                                                                                                                                                                                                                                                           |
| Connector type:        | screw terminals                                                                                                                                                                                                                                                                                                             |
| Wireless:              | Wi-Fi, 2.4 GHz - IEEE 802.11g                                                                                                                                                                                                                                                                                               |
| Mobile phones support: | <ul style="list-style-type: none"><li>• The <a href="#">wBox</a> free application on Android</li><li>• The <a href="#">wBox</a> free application on iOS</li></ul>                                                                                                                                                           |
| Main features:         | <ul style="list-style-type: none"><li>• Local control by physical button,</li><li>• schedule,</li><li>• timer,</li><li>• sunrise and sunset mode,</li><li>• remote access,</li><li>• voice control,</li><li>• µWiFi technology support</li><li>• Illuminated, color front panel with an additional control button</li></ul> |
| Housing:               | Plastic (ABS), DIN, TS-35 rail mounting                                                                                                                                                                                                                                                                                     |
| "Index of Protection": | IP20                                                                                                                                                                                                                                                                                                                        |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                       |                   |
|-----------------------|-------------------|
| Color:                | White             |
| Operation temp:       | -20 °C ... 50 °C  |
| Weight:               | 0.062 kg          |
| Dimensions:           | 90 x 17.5 x 65 mm |
| Manufacturer / Brand: | BleBox            |
| Guarantee:            | 2 years           |

## PRESENTATION



Front panel:




Connectors:






Side view:

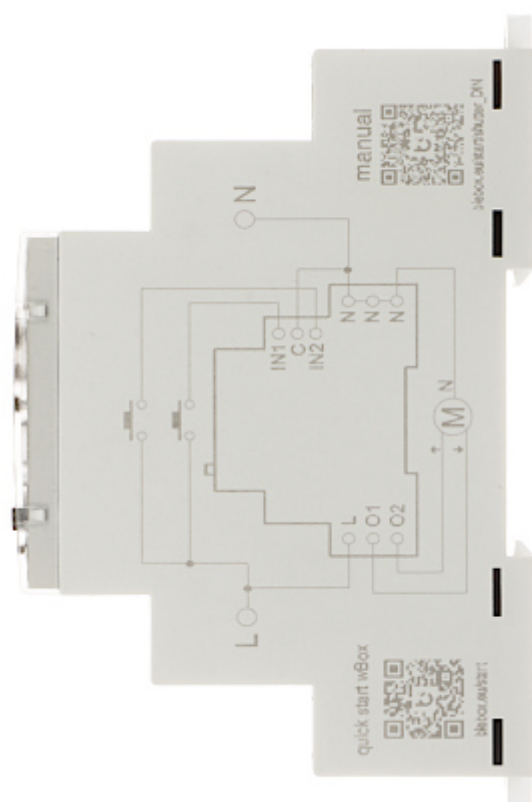

Mounting side view:



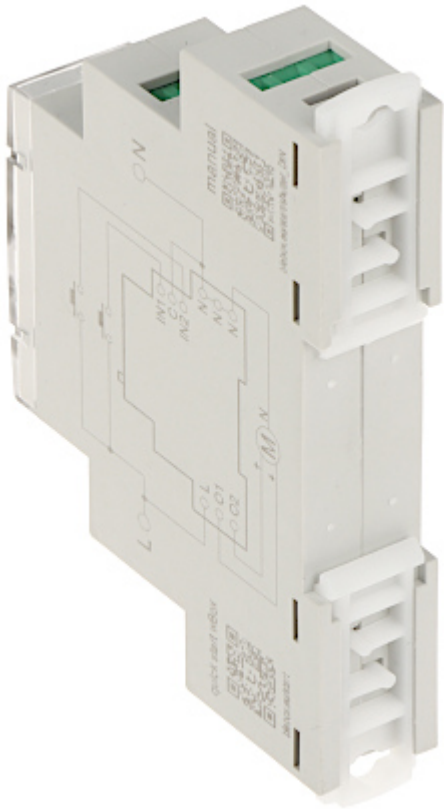

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|