

Code: AWO-500

ALARM CONTROL PANEL ENCLOSURE **AWO-500**

Net: **72.23 EUR** Gross: **72.23 EUR**

Enclosure is designed to indoor use, it has also very good corrosion protection.



SPECIFICATION

Transformer:	40 VA
Place for battery:	7 Ah / 12 V, 17 Ah / 12 V
Tamper protection:	TAMPER switch indicating open the cover
Current-carrying capacity of TAMPER output:	max. 500 mA @ 50 V DC
"Index of Protection":	IP20
Key closed:	✓
Main features:	• Flush-mounted • Removable mounting plate • Enclosure has a distance from a wall
Application:	• Alarm control panel : - DSC: PC1616, 1832, 1864, 4020+ 5108 (4108, 5208, 5100, 4116)Moduły/modules: 1) 3x (4108, 5108, 5208, 5100, 4116)2) 4204, 4216, 4580, 5400, 5204, 5580, 5200+ 5108 (4108, 5208, 5100, 4116) - PARADOX: 728 ULT, E55, 65, SP4000, SP5500, 6000, 7000, EV048, 192+ ZX4Moduły/modules: 1) ZX8, APR3- HUB2, PGM42) 2x ZX4 - RISCO: 1) PRO24, 116, 128, 140Moduły/modules: EZ16 (E04, EZ8) - SATEL: 1) CA4V1, 5,6,10, VERSA 5,10,15, INTEGRA 24, 32+ CA64E (CA10E, SM, MST1)Moduły/modules: CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS-OC, OPS-R, OPS-ROC,VGM 16, SR,DR, PTSA, ACC-KP-PS) + CA64E (CA10E, MST1, SM) - PYRONIX: 1) MATRIX 424, 6, 816, 832, 832+ - CROW: 1) RUNNER 4,8 - TELMOR: 1) TCA- 824 - ROEL: SIGMA 6,12, CERBER - ROGER: 1) PR402, CPR 32- SE - EBS: 1) PX 202A - PULSAR: 1) MS1512, MSR1512, MSRK1512 2) MS2512, MSR2512, MSRK2512 • GSM • Radio module • and others
Power adapter included:	✓
Voltage:	• 16 V AC • 18 V AC
Operation temp:	-10 °C ... 40 °C
Dimensions:	310 x 305 x 100 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Weight:	4.65 kg
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION

Front view:




Internal view of the housing:

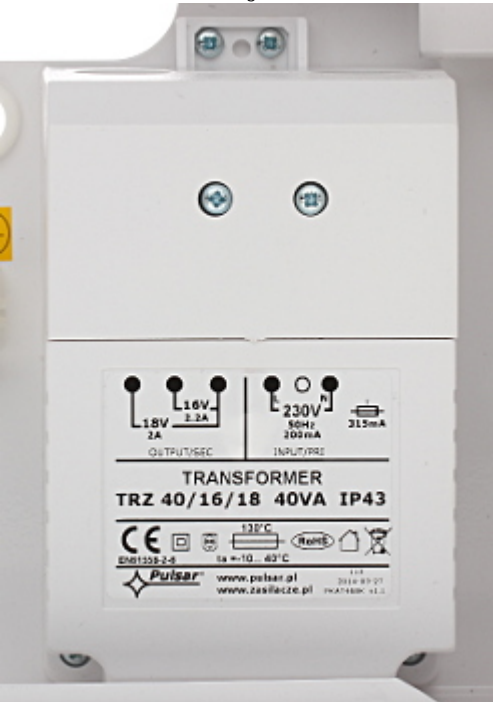


Mounting side view:



Dimensions:

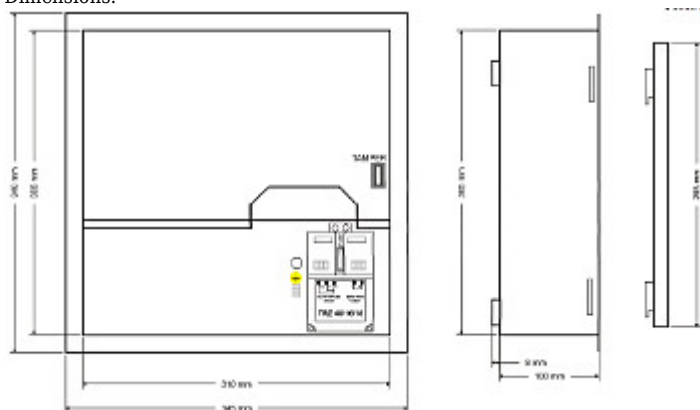

In the kit:

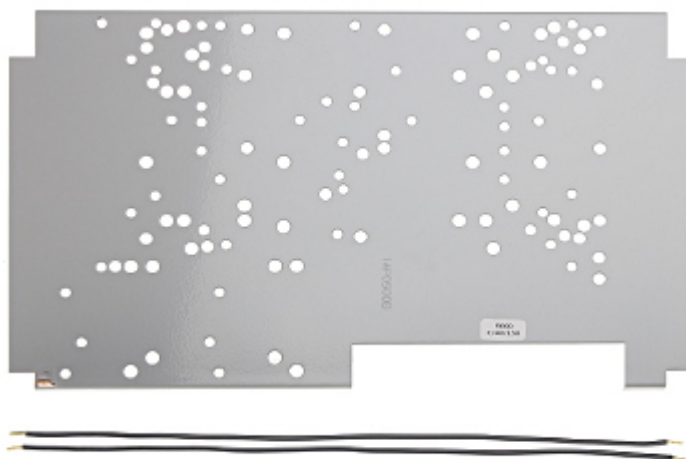

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------