

Code: RI-4/1F-DS

SPLITTER RI-4/1F-DS

Net: 1.90 EUR Gross: 1.90 EUR




SPECIFICATION

Number of inputs:	1 pcs - F socket
Number of outputs:	4 pcs - F socket
Frequency range:	5 ... 2400 MHz
Attenuation:	< 8.0 dB @ 5 MHz ... 40 MHz < 8.5 dB @ 40 MHz ... 1000 MHz < 9.5 dB @ 1000 MHz ... 1750 MHz < 11.0 dB @ 1750 MHz ... 2400 MHz
Isolation between outputs:	> 20 dB @ 5 MHz ... 40 MHz > 20 dB @ 40 MHz ... 1000 MHz > 20 dB @ 1000 MHz ... 1750 MHz > 20 dB @ 1750 MHz ... 2400 MHz
Possibility to pass the DC voltage to the preamplifier:	max. 24 V / 0.8 A (for each output)
Shielding:	✓
Impedance:	75 Ω
Weight:	0.040 kg
Dimensions:	78 x 48 x 15 mm
Guarantee:	2 years

PRESENTATION


Outputs:

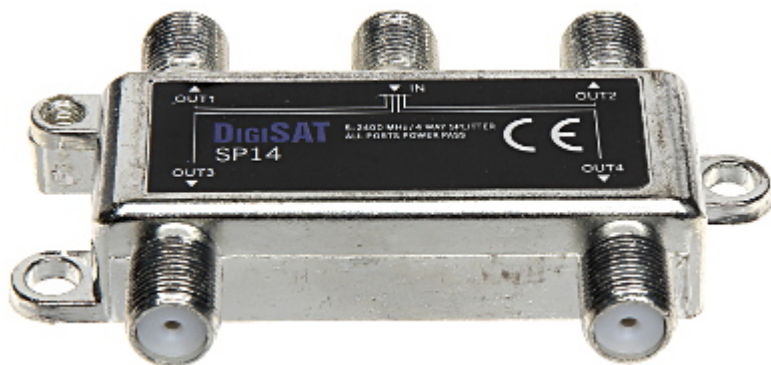

Input:



Top view:

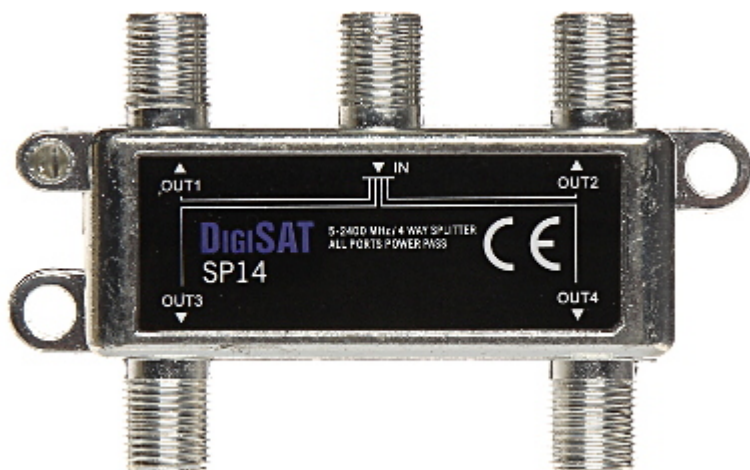

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------