

Code: DC-015L

MULTIPLEXER DC-015L TERRA

Net: 19.30 EUR Gross: 19.30 EUR

The DC-015L antenna multiplexer with 3 inputs is used as an element combining signals from 3 antennas (receiving signals in FM+VHF I/II (47...108 MHz), VHF III (174...230 MHz) and UHF (470...790 MHz) bands), it is installed on the mast carrying the antenna set. It is possible to transfer 12 V DC power supply to the preamplifier via the UHF input.

The multiplexer has a built-in LTE signal filter attenuates unwanted signals in the 800 MHz band (791...862 MHz frequencies) intended for the implementation of LTE data services.

The die-cast housing provides high screening efficiency by preventing the penetration of interfering signals into the device.



SPECIFICATION



Input:	• FM / VHF (I/II) : 47 ... 108 MHz - F socket, • VHF (III) : 174 ... 230 MHz - F socket • UHF : 470 ... 790 MHz + DC - F socket
Impedance:	75 Ω
Insertion loss:	< 1 dB @ FM / VHF (I/II) < 1 dB @ VHF (III) < 2 dB @ UHF
DC-transition:	24 V / 200 mA
Main features:	• Built-in LTE filter • Isolation VHF, UHF > 20 dB • high screening efficiency
Housing:	die-cast housing mounted inside compact plastic enclosure
Mount:	The device housing can be easily installed to the walls using the screws and to the masts with a tie
Operation temp:	-20 °C ... 50 °C
Weight:	0.18 kg
Dimensions:	107 x 89 x 43 mm
Manufacturer / Brand:	TERRA
Guarantee:	2 years

PRESENTATION

View after open the front cover:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

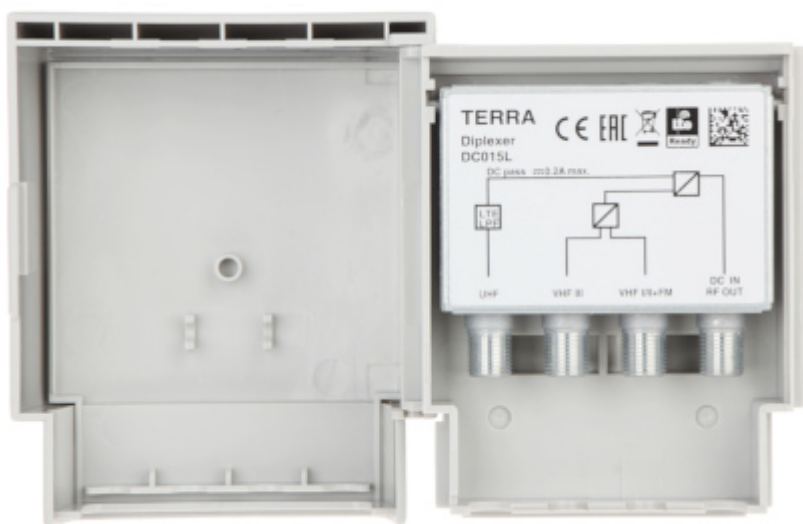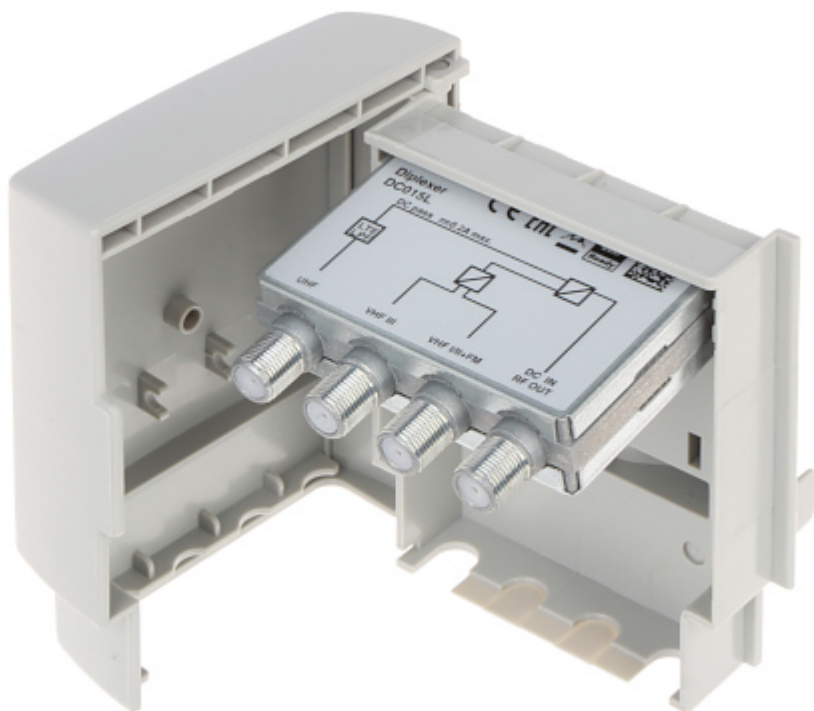

View with closed cover:



Mounting side view:



In the kit:



PACKAGE



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

