

Code: DS-1H34-0101P

EXTENDER **DS-1H34-0101P** Hikvision

Net: **37.72 EUR** Gross: **37.72 EUR**

The DS-1H34-0101P allows to increase the distance of PoE supply and data sending via UTP category 5e up to 200 m - EXTEND OFF or up to 400 m - EXTEND ON. The device does not require external power supply.

The cascade connection of max. 4 extenders allows to send the data and powering up to 500 m.

WARNING! For cascade mode and with the EXTEND mode enabled, the maximum camera power should not exceed 5 W.



SPECIFICATION

Standards:	PoE : IEEE 802.3at, IEEE 802.3af
Input voltage:	42 ... 57 V DC
Output voltage:	42 ... 57 V DC
Number of inputs:	1
Number of outputs:	1
Connector:	2 x RJ-45 socket
LED indicators:	Link/Act
Supported data rates:	• Range : 2 x 100 m - Input / Output @ 10 / 100 Mbps, The EXTEND mode disabled • Range : 2 x 200 m - Input / Output @ 10 Mbps, The EXTEND mode enabled
Output power:	according to IEEE 802.3at - The power should be reduced by 2 W, which the device consumes
Protections:	• Overvoltage protection • Short-circuit protection
Housing:	Metal
Operation temp. / Relative humidity:	-30 ... 70 °C / 10 ... 90 %
Weight:	0.19 kg
Dimensions:	94 x 72 x 26 mm
Manufacturer / Brand:	Hikvision
SAP Code:	301800919
Guarantee:	3 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Top view:




Connectors:





Transmission schematic diagram:

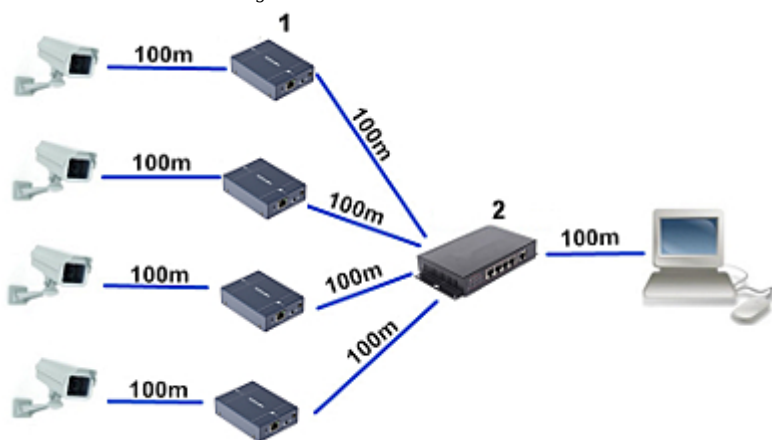

1. DS-1H34-0101P

2. Switch PoE

In the kit:



PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

