

Code: EPOC-131VA

ETHERNET CONVERTER **EPOC-131VA** PoE I-VIEW

Net: **22.94 EUR** Gross: **22.94 EUR**

The EPOC-131VA allows to send the data and PoE 802.3 at/af powering via coaxial cable or any two-wire cable. The device operates from the PoE switch side.



SPECIFICATION

LAN ports:	1 pcs RJ45
Transmission ports:	1 pcs BNC
Transmission speed:	10 / 100 Mbps Full Duplex
Transmission range:	max. 1500 m
Protections:	128-bit AES encryption
Main features:	• Plug & Play • Support for HTTP • Support for IP cameras and network devices • Easy installation - doesn't require any configuration of IP nor MAC address • Watchdog built-in • The device operates from the PoE switch side
Power supply:	48 V ... 56 V DC - Option (power adapter not included)
Weight:	0.150 kg
Dimensions:	100 x 78 x 35 mm
Manufacturer / Brand:	I-VIEW
Guarantee:	2 years

PRESENTATION

Device connectors:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Rear view:



Top view:




Transmission schematic diagram:

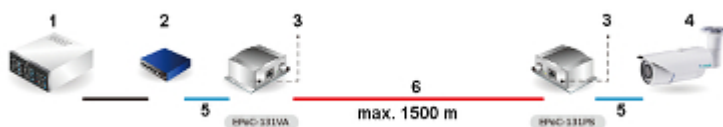

1. NVR
2. Switch PoE
3. DC 48V power supply - option
4. IP Camera
5. Twisted-pair cable
6. Coaxial cable

Max. distance of powering depending on the power:

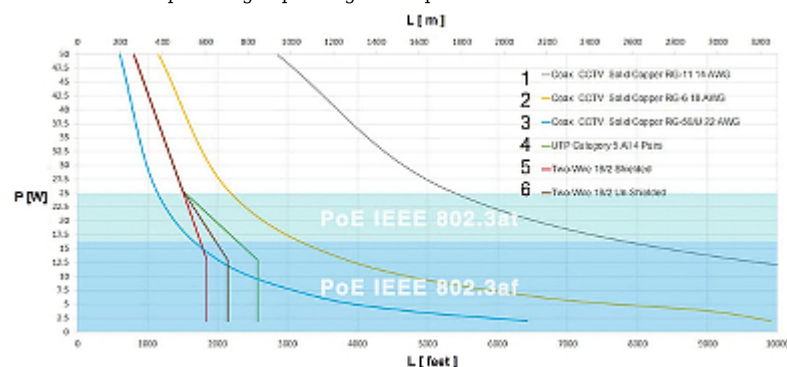

1. Coaxial cable 14AWG
2. Coaxial cable 18AWG
3. Coaxial cable 22AWG
4. Cat. 5 UTP - all 4 pairs
5. Two-wire cable, shielded 18AWG
6. Two-wire cable, unshielded 18AWG

PACKAGE



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

