

Code: HV/HDMI+HV

CONVERTER HV/HDMI+HV

Net: 49.77 USD Gross: 61.22 USD

The HV/HDMI+HV converter allows to connect the AHD/HD-CVI/HD-TVI/CVBS signals to the standard monitor or projector with a HDMI input. From the video signal the HV/HDMI+HV operates as a loop-through device, equipped with signal input and output.



SPECIFICATION

Input:	1 x BNC - AHD / HD-CVI / HD-TVI / CVBS @ 5.0 Mpx (max)
Output:	<ul style="list-style-type: none">• 1 x BNC - AHD / HD-CVI / HD-TVI / CVBS @ 5.0 Mpx (max)• 1 x HDMI @ 1080p
Output signal possible standards:	PAL / NTSC
Supported resolutions:	<ul style="list-style-type: none">• HDMI - 1080p only• BNC - 5.0 Mpx (max)
OSD menu:	—
Main features:	In the case of no input signal, the device displays a test chart (color bars) on the connected screen
Power supply:	12 V DC / 500 mA (power adapter included)
Weight:	0.132 kg
Dimensions:	110 x 80 x 28 mm
Guarantee:	2 years

PRESENTATION



DELTA-OPTI Monika Matysiak / VAT:PL5251295225 / 60-713 Poznań, ul. Graniczna 10
Tel:+48 61 864 69 60 / GSM:+48 607 60 11 66 / Fax:+48 61 864 69 65 / e-mail:shop@delta.poznan.pl
Monday-Friday: 8.00-19.00 / Saturday: 8.00-14.00



Top view:




Connectors:





Schematic diagram of converter operation:

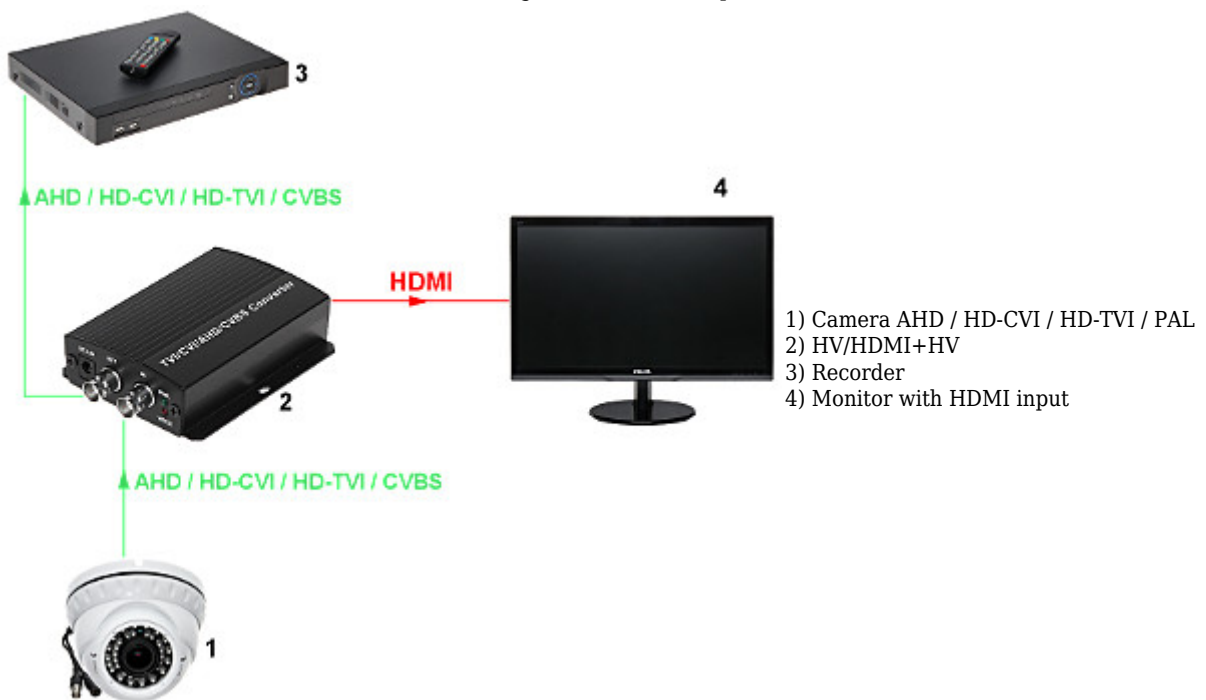

In the kit:



OUR OPINIONS



DELTA-OPTI Monika Matysiak / VAT:PL5251295225 / 60-713 Poznań, ul. Graniczna 10
 Tel:+48 61 864 69 60 / GSM:+48 607 60 11 66 / Fax:+48 61 864 69 65 / e-mail:shop@delta.poznan.pl
 Monday-Friday: 8.00-19.00 / Saturday: 8.00-14.00

- The device doesn't display properly an image on the HDMI output in the AHD @ 12.5 fps standard.

PACKAGE

Dimensions (L x W x H): 215x160x70 mm	Gross Weight: 0.32 kg
---------------------------------------	-----------------------

