

Code: VGA-1920F

CONVERTER TO COMPUTER MONITORS **VGA-1920F**

Net: **25.12 EUR** Gross: **25.12 EUR**

The VGA-1920F device converts Composite Video signal or S-Video signal to VGA signal.

It supports the VGA output resolutions up to 1920x1200 with aspect ratios: 4:3, 16:9 and 16:10.



SPECIFICATION

Input:	• Video composite (BNC socket), • S-VIDEO, • VGA (bypass)
Input signal possible standards:	• PAL, NTSC, • VGA (bypass)
Output:	VGA (bypass)
Supported resolutions:	• 4:3 800 x 600 @ 60/75 Hz 1024 x 768 @ 60 Hz 1280 x 1024 @ 60 Hz 1600 x 1200 @ 60 Hz • 16:9 / 16:10 1280 x 720 @ 60 Hz 1366 x 768 @ 60 Hz 1440 x 900 @ 60 Hz 1680 x 1050 @ 60 Hz 1920 x 1080 @ 60 Hz 1920 x 1200 @ 60 Hz
OSD menu:	✓
Possible settings:	• brightness, contrast, saturation, hue - the settings are saved after power off • PIP - Picture In Picture
Power supply:	5 V / 1 A (power adapter included)
Weight:	0.07 kg
Dimensions:	100 x 65 x 26 mm
Guarantee:	2 years

PRESENTATION

Control keys:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Device connectors:



Example of device using:

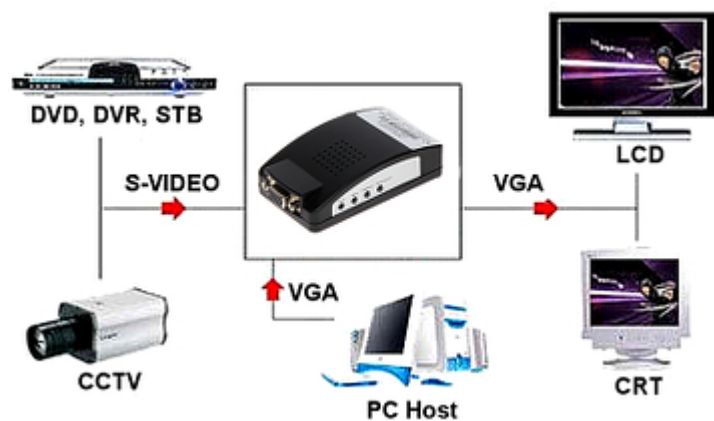

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------