

Code: E76-2812

CAMERA E76-2812 STANDARD: PAL, 700 TVL, 960H 2.8 ... 12 mm

Net: 58.99 EUR Gross: 58.99 EUR

Camera equipped with perfect very high resolution Sony sensor and Sony Effio Digital Image Processor. The built-in vari-focal lens allows to set very wide range of camera view angles.

The high resolution sensor guarantees high detailed image, so this camera is perfect solution for surveillance systems requiring persons or vehicles recognition, for example at places like: buildings entrance, lobbies, gates, lounges, etc. OSD menu allows to set many useful functions and parameters.

OSD menu controller is placed on the cable. It allows to easily set or change the parameters and functions of the camera without move or unmount it.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).



SPECIFICATION

Standard:	PAL
Sensor:	1/3 " Sony CCD
Digital Image Processor:	DSP Sony Effio-E
Resolution:	700 TVL, 960H
Lens:	2.8 ... 12 mm - 2.0 Mpx
View angle:	81 ° ... 23 ° (manufacturer data) 77 ° ... 37 ° (our tests result)
Range of IR illumination:	60 m
S/N ratio:	52 dB
Video output:	1 Vpp / 75 Ω
Power supply:	12 V / 570 mA
Main features:	• DNR - Digital Noise Reduction • BLC/HLC - Back Light / High Light Compensation • WDR - Wide Dynamic Range • Motion Detection - max. 4 zones • Privacy zones - max. 4 • Day/night mode - manual/auto • White Balance - ATW/Manual • Sharpness - sharper image outlines • Mirror - horizontal
OSD menu:	✓
Housing:	Compact, Metal
Color:	Graphite
"Index of Protection":	IP66
Operation temp:	-20 °C ... 50 °C
Weight:	0.93 kg
Dimensions:	295 x 112 x 105 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Supported languages:	English
Guarantee:	2 years

PRESENTATION


Front view:



Bottom view:



Mounting side view:

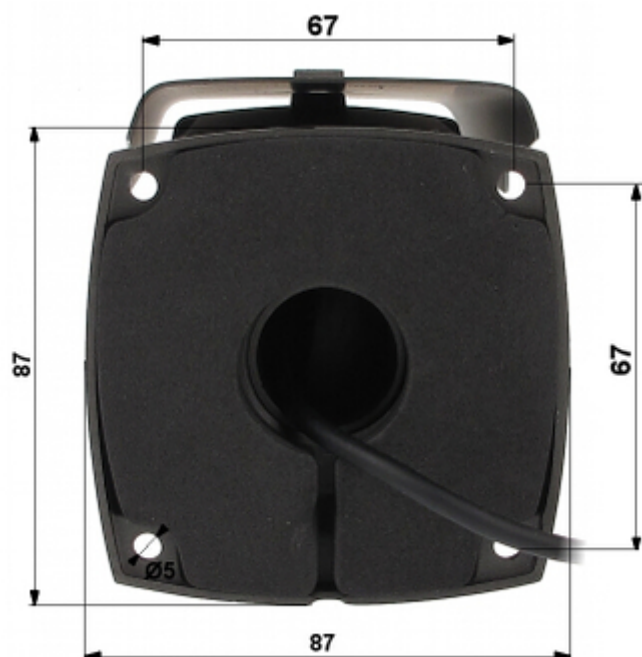

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



- Camera cables are hidden inside the bracket - aesthetic protection against cutting.
- The camera bracket has a regulation in all three planes.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

