

Code: M-203G

SINGLE-MODE MEDIA CONVERTER M-203G ULTIMODE

Net: 22.60 EUR Gross: 22.60 EUR

The M-203G converter allows to change the data stream transmission media from standard STP/UTP cable to single-mode fiber cable.

Media converter has two SC connectors. One is used to transmit (TX) signal, and the second to receive (RX) signal. Optical signal is transmitted and received in the II transmission window of 1310 nm.



SPECIFICATION

Optical connector type:	2 pcs SC / PC
Number of fibers:	2 pcs
Transmission range:	20 km - Single-mode fiber
Supported standards:	IEEE 802.3, IEEE 802.3u, 802.3z
Port LAN:	1 pcs (RJ-45. UTP/STP)
Transmission speed:	10 / 100 / 1000 Mbps
Optical wavelength:	1310 nm
Main features:	• MDI/MDI-X auto detection feature - auto detecting the data transmission mode • Auto detection of the bit rate • Bi-directional transmission via two fibers • LED indicators showing operating status
Power supply:	5 V DC / 1.2 A (power adapter included)
Operation temp:	0 °C ... 50 °C
Weight:	0.174 kg
Dimensions:	106 x 70 x 26 mm
Manufacturer / Brand:	ULTIMODE
Guarantee:	2 years

PRESENTATION

Front panel:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Rear panel:



Example of device using:

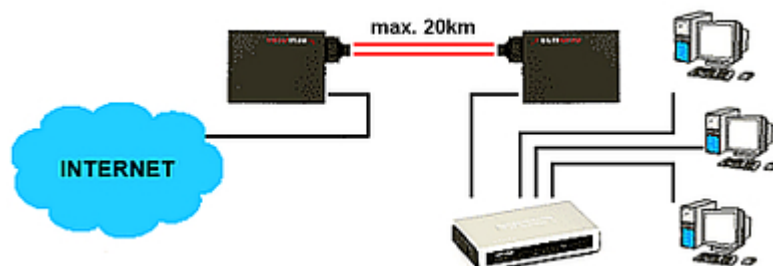

In the kit:



PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

