

Code: KW-6/3.5X35

EXPANSION PLUG **KW-6/3.5X35** KLIMAS

Net: **0.06 EUR** Gross: **0.06 EUR**

Expansion plug for solid substrates with countersunk head screw.

The expansion plug is designed for fixing of light-duty interior finish systems, wood members and lightweight installations or mounting clamps on solid substrates.

Types of substrates for installation: plain concrete of class not lower than C20/25 (PN-EN 206/1:2003), solid clay brick of class not lower than 15 (PN-EN 771-1:2011), aerated concrete of variety 600, class 5 (PN-EN 771-4:2011) and solid sand-lime brick of class 20 (PN-EN 771-2:2011).



SPECIFICATION

Material:	• Expansion plug, Polypropylene • Screw, Steel galvanized
Drilling diameter:	6 mm
Expansion plug length:	30 mm
Screw dimensions:	Ø 3.5 x 35 mm, PZ-2
Application:	• Concrete • Solid clay brick • Solid sand-lime brick
Manufacturer / Brand:	KLIMAS
Guarantee:	2 years


PRESENTATION



Method of mounting:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

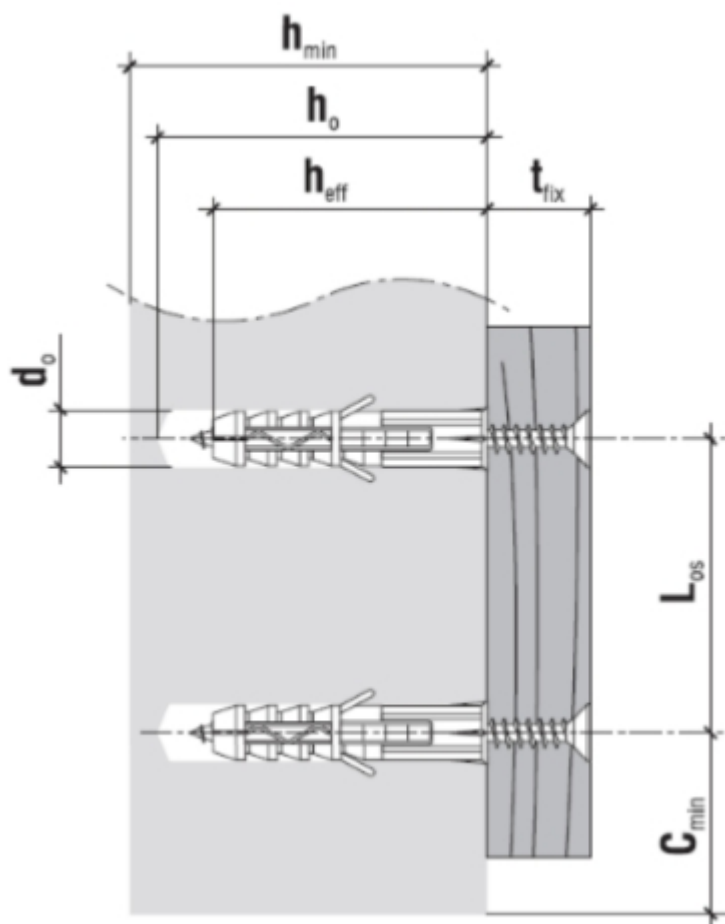

Hole/drill diameter [d_o] - 6 mm
 Min. substrate thickness [h_{min}] - 45 mm
 Drilled hole depth [h_o] - 40 mm
 Anchorage depth [h_{eff}] - 30 mm
 Max. usable length [t_{fix}] - 5 mm
 Min. axial distance (concrete/other substrate) [L_{os}] - 60/90 mm
 Min. distance from edge [c_{min}] - 60 mm

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------