

Code: AN900-B100

## INFRA-RED BARRIERS **AN900-B100** 3 BEAMS

Net: **97.85 EUR** Gross: **97.85 EUR**

The alarm systems based on Passive Infra-Red detectors catch the intruder, which is inside the room already. The system based on Infra-Red barriers is intended to cause an alarm when intruder only intends to invade the premises, and there is still outside the building.

The curtain is composed of several active IR barriers (beams detectors), which create an invisible "grill" inside the window or door bay. Tampering with this "grill" area causes an immediate start alarm.

IR curtains can be also used to protect the controlled crossing, gates, fences, precious objects at open areas, etc. In museums the IR curtains can be successfully used as conflict-free, discreet separation the viewers from the valuable exhibits.

During the constant interruption of the beam (by placing an obstacle between the transmitter and receiver), the barrier does not return to its original state. This behavior of the barrier is important for control gates, ramps, etc.



### SPECIFICATION

|                                           |                                                                                                                                                                                                                                                                                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of beams:                          | 3                                                                                                                                                                                                                                                                                               |
| Detection method:                         | 3 beams blocked simultaneous                                                                                                                                                                                                                                                                    |
| Outdoor detection range:                  | 100 m                                                                                                                                                                                                                                                                                           |
| Indoor detection range:                   | 300 m                                                                                                                                                                                                                                                                                           |
| Beam characteristics:                     | Infrared modulated pulse triple beam                                                                                                                                                                                                                                                            |
| Interruption time (blocking of the beam): | 50 ... 700 ms (selectable)                                                                                                                                                                                                                                                                      |
| Alarm period:                             | 2 s ± 1 (nominally)                                                                                                                                                                                                                                                                             |
| Alarm output:                             | Relay (AC/DC 30V max. 0.3A)                                                                                                                                                                                                                                                                     |
| Tamper contact:                           | N.C. opened during remove the cover (transmitter and receiver)                                                                                                                                                                                                                                  |
| Angles adjustment range:                  | ± 10 ° vertical<br>± 90 ° horizontal                                                                                                                                                                                                                                                            |
| Assembly:                                 | on the wall or pole                                                                                                                                                                                                                                                                             |
| Power supply:                             | 12 ... 24 V DC                                                                                                                                                                                                                                                                                  |
| Current consumption:                      | max. 80 mA                                                                                                                                                                                                                                                                                      |
| "Index of Protection":                    | IP65                                                                                                                                                                                                                                                                                            |
| Operation temp. / Relative humidity:      | -25 °C ... 55 °C / max. 95 %                                                                                                                                                                                                                                                                    |
| Main features:                            | <ul style="list-style-type: none"><li>• high grade aspherical lens</li><li>• beam interruption time adjustment</li><li>• automatic gain control circuit responds to changes in weather conditions</li><li>• up to 99.5% beam blocking stability due to heavy rain, dust, snowing, fog</li></ul> |

|                                     |                   |
|-------------------------------------|-------------------|
| Transmitter or receiver dimensions: | 287 x 91 x 110 mm |
| Transmitter and receiver weight:    | 1.25 kg           |
| Guarantee:                          | 2 years           |


## PRESENTATION

Transmitter and receiver (after remove the cover):





Mounting dimensions:

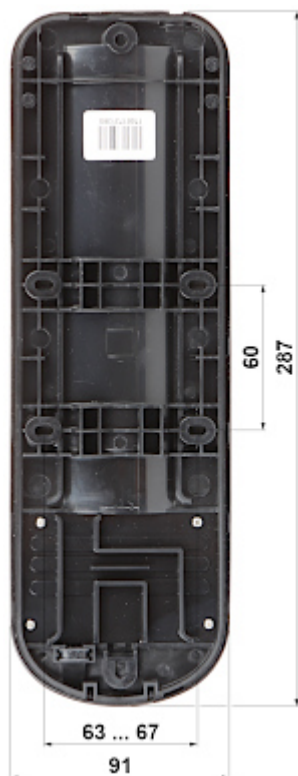

In the kit:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60