

Code: IEC-GK/SKR-113

## IEC SOCKET IEC-GK/SKR-113

Net: 2.41 EUR Gross: 2.41 EUR

The patented design, based on "Self-Install" concept, ensures professional, durable connection. Whole procedure takes no more than several seconds. The connector installed properly is fully integrated with the cable, however the plug is reusable - the cap can be unscrewed and the plug pulled off.



### SPECIFICATION

|                                   |                                                                                                               |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------|
| Connector type:                   | IEC Angular socket                                                                                            |
| Attachment of connector elements: | Twisting on                                                                                                   |
| Shield fastening:                 | Twisting-on                                                                                                   |
| Wire mounting:                    | Pressing                                                                                                      |
| Application:                      | Coaxial cable                                                                                                 |
| Dielectric diameter:              | min. 4.9 mm<br>max. 5.1 mm                                                                                    |
| Cable diameter:                   | max. 7.5 mm                                                                                                   |
| Impedance:                        | 75 $\Omega$                                                                                                   |
| Material:                         | Metal / PET                                                                                                   |
| Watertightness:                   | ✓                                                                                                             |
| Example of application:           | <ul style="list-style-type: none"><li>• RG6</li><li>• HFEK</li><li>• Triset113</li></ul>                      |
| Main features:                    | <ul style="list-style-type: none"><li>• Very easy and quick assembly</li><li>• Corrosion resistance</li></ul> |
| Weight:                           | 0.023 kg                                                                                                      |
| Dimensions:                       | 39 x 23 x 14 mm                                                                                               |
| Guarantee:                        | 2 years                                                                                                       |

### PRESENTATION


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



View after take connector to pieces:



Method of mounting:

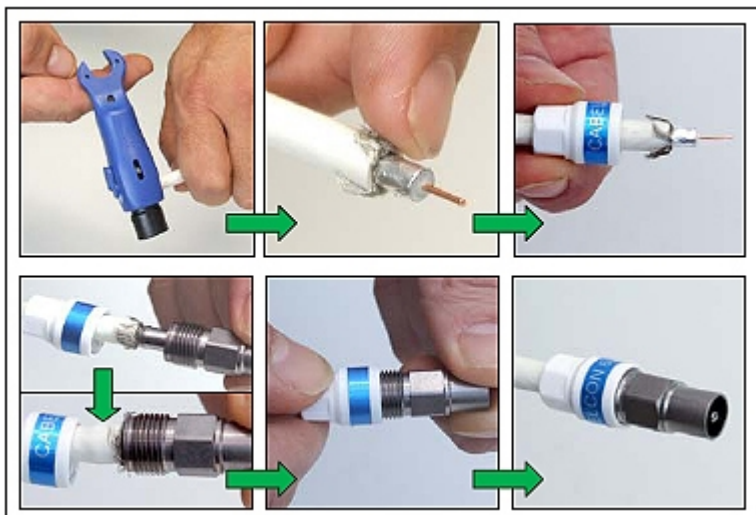

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|