

Code: OPV-8/R19

## VIDEO OVERVOLTAGE LIMITER **OPV-8/R19**

Net: **35.19 EUR** Gross: **43.28 EUR**

The OPV-8/R19 overvoltage limiter effectively protects signal line carrying away the stroke current to the ground, due to above provides adequate overvoltage protection for electronic devices. Our statistics collected from many years of service show that about 25 percent of damages of electronic equipment was caused by overvoltages.

The OPV-8/R19 does not affect signal quality and is a passive device, no supplying is required.

**ATTENTION!** Before installation please read the following instructions: Any installation work cannot be led during thunderstorm. The OPV-8/R19 requires good quality grounding installation. The limiter should be placed as near as possible to the protected device. The OPV-8/R19 is not symmetrical and the protected devices must be connected to the "PROTECTED DEVICE" BNC output sockets. The "LINE" input BNC sockets must be connected to the transmitting lines, which may surge.



### SPECIFICATION

Standard:	<ul style="list-style-type: none"><li>• AHD - 5 Mpx</li><li>• HD-CVI - 8 Mpx 4K UHD</li><li>• HD-TVI - 5 Mpx</li><li>• CVBS - PAL/NTSC</li></ul>
Threshold voltage:	> 2.4 V (wire/wire)
Maximum stroke current:	5 kA
Serial impedance per line:	1.1 $\Omega$ ( Wire )
Capacity:	< 7 pF
Bandwidth:	0 ... 140 MHz
Insertion loss:	0.3 dB
Response time:	15 ns
Grounding:	Indirect, via inserted cable
Number of channels:	8
Input socket type:	BNC socket
Output socket type:	BNC socket
Housing:	RACK 19", 1U
Operation temp:	-20 °C ... 55 °C
Permissible relative humidity:	< 95 %
Weight:	0.35 kg
Dimensions:	482 x 44 x 38 mm
Manufacturer / Brand:	DELTA
Guarantee:	<b>3 years</b>

### PRESENTATION

Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Rear view:




Top view:




Operation way:

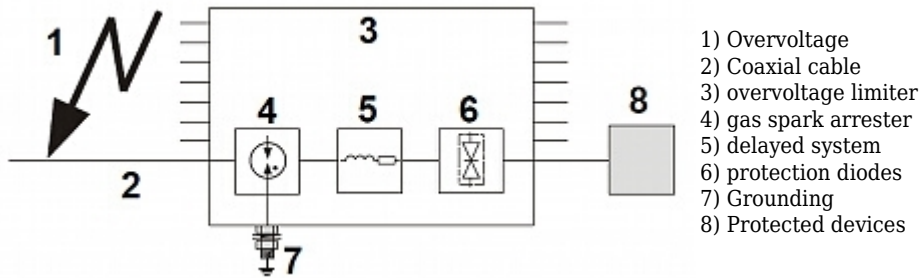

Connection diagram:

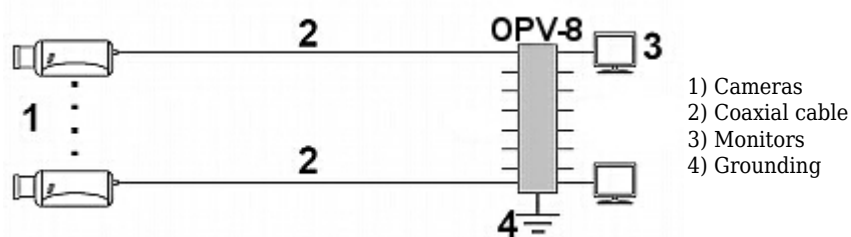

In order to fully protect all equipment connected to video lines against overvoltages, this application is recommended:

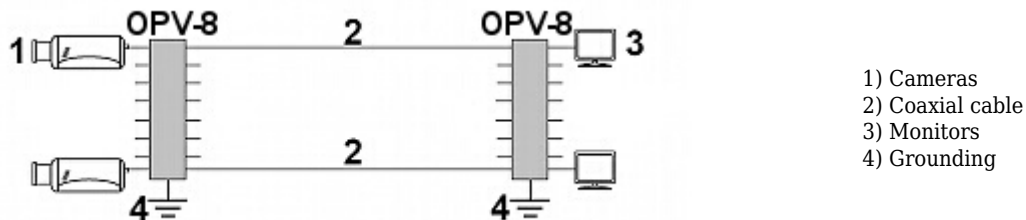

## OUR TESTS

Amplitude - frequency response (RF PWR OUT = 0 dBm):





DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60