

Code: CDV70-2812

VANDALPROOF CAMERA **CDV70-2812** STANDARD: PAL, 700 TVL 2.8 ... 12 mm

Net: **65.18 EUR** Gross: **65.18 EUR**

Camera equipped with perfect very high resolution Sony sensor and Sony Effio Digital Image Processor.
Housing construction allows to mount the camera to the ceiling and the wall (image is right oriented in both cases). Camera module is mounted inside the dome housing, which allows to rotate the camera on any axis.
Camera is according to IP65 Index of Protection norm.



SPECIFICATION

Standard:	PAL
Sensor:	1/3 " Sony ICX811AK
Digital Image Processor:	DSP Sony Effio-E
Resolution:	700 TVL
Lens:	2.8 ... 12 mm, 2 Mpx
Min. illumination:	0.001 Lux
View angle:	• 81 ° ... 23 ° (manufacturer data) • 80 ° ... 30 ° (our tests result)
Video output:	1 Vpp / 75 Ω
S/N ratio:	> 52 dB
Vandal-proof:	✓
Main features:	• 2-DNR - Digital Noise Reduction • BLC/HLC - Back Light / High Light Compensation • WDR - Wide Dynamic Range • Max. 4 privacy zones • Day/night mode - manual/auto • White Balance - ATW/Manual • Sharpness - sharper image outlines • Mirror - horizontal
Power supply:	12 V DC / 110 mA
OSD menu:	✓
"Index of Protection":	IP65
Housing:	Dome - Metal
Color:	White
Permissible relative humidity:	max. 95 %

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Operation temp:	-10 °C ... 50 °C
Weight:	0.575 kg
Dimensions:	Ø 138 x 100 mm
Guarantee:	2 years

PRESENTATION

View after remove the dome cover - OSD menu control joystick visible on the cable:



Mounting side view:




In the kit:




OUR TESTS

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at artificial illumination (about 30Lux):

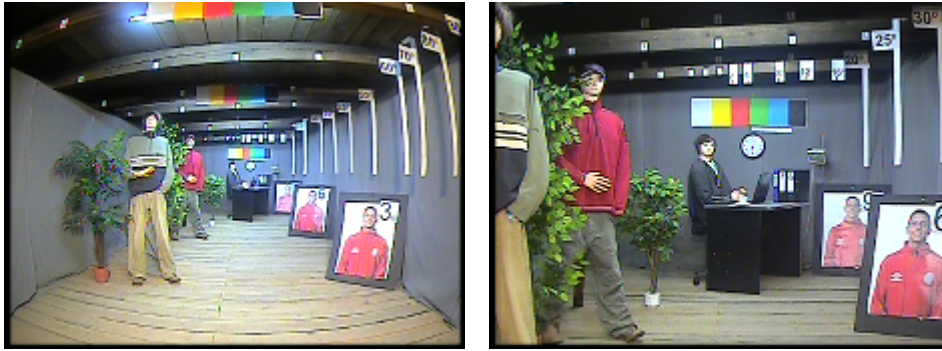

Camera image at direct strong light opposite to camera:

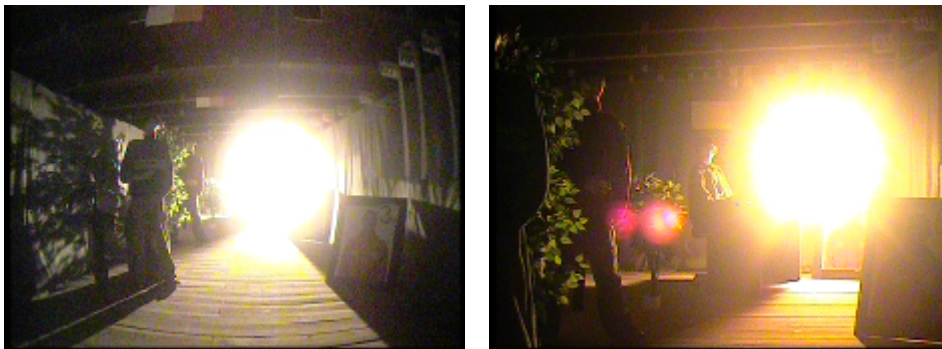

Camera image at night conditions, at different illumination values show below:


1 LUX:



0.1 LUX:



0.01 LUX:



OUR OPINIONS



- Possibility to ceiling or wall installation.



- Inconvenient lens adjustment.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------