

Code: MS-ACT50-4K

AHD, HD-CVI, HD-TVI, PAL MONITOR **MS-ACT50-4K** 5 "

Net: **193.11 EUR** Gross: **193.11 EUR**

Multi-functional tester of AHD, HD-CVI, HD-TVI cameras, analog cameras, Speed Dome (PTZ) cameras has implemented many additional functions, necessary during initialization of the CCTV installation system.



SPECIFICATION

Video standard:	AHD - 8 Mpx @ 15 fps , HD-CVI - 8 Mpx @ 12.5, 15 fps , HD-TVI - 8 Mpx @ 12.5, 15 fps , PAL, NTSC
Screen size:	5 "
Native resolution:	800 x 480 px
Image adjustment:	✓
Sleep function:	✓
OSD menu:	✓
Video input:	• 1 pcs - AHD / HD-CVI / HD-TVI / CVBS - PAL / NTSC, BNC socket • 1 pcs VGA (D-Sub 15-pin) max. 1920 x 1080 • 1 pcs HDMI max. 3840 x 2160, 4K UHD
Video output:	—
Audio input:	1 pcs Jack 3.5 mm socket
Audio output:	—
RS-485 interface:	PELCO-D/P, SAMSUNG, PANASONIC, LILIN, YAAN, and others The motozoom lens control works only via RS-485 Baudrate : 600 ... 115200 b/s
Operation as power source:	• 12 V DC / 1 A • 5 V DC 1 A - Port USB
Power supply:	• Li-Ion battery 3.7 V, 5200 mAh • 5 V DC / 2 A - micro USB (power adapter included)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Estimated battery operation time:	min. 6.5 hours
Main features:	LAN (twisted-pair) cables testing
Operation:	Large, readable buttons
Operation temp:	0 °C ... 50 °C
Permissible relative humidity:	30 % ... 90 %
Weight:	0.42 kg
Dimensions:	184 x 110 x 41 mm
Supported languages:	Polish, English, Czech, French, Spanish, German, Portuguese, Russian, Serbian, Turkish, Italian
Guarantee:	2 years

PRESENTATION

Front panel:



Top view:



Bottom view:



Rear view:



Place for battery:



The tester with accessories housed in a handy bag:




In the kit:



Main menu:



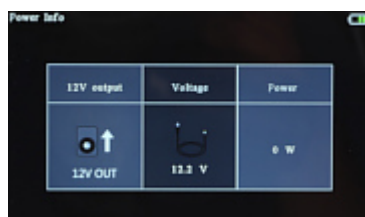

OUR OPINIONS



- Unstable operation at temperatures below 0°C.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

