

Code: GEMINI-62BB-13P

IP CAMERA **GEMINI-62BB-13P** - 1080p 3.7 mm

Net: **68.83 EUR** Gross: **68.83 EUR**

IP camera with efficient H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 1080p (2.1 MPx). Very easy operation by Internet Explorer browser allows the users to convenient and remote support, and also remote management of the camera. Included camera software enables management and integrated monitoring of many network cameras. Its using allows to create large surveillance system.

ICR - The movable IR filter allows to perfect colors reproduction in daylight and wide gray-scale with high sharpness of the image at night mode. Camera bracket allows to adjust the camera to any direction, and power cables are hidden inside the bracket.

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.9 " Sony EXMOR CMOS
Digital Image Processor:	Hisilicon 3516
Matrix size:	2.43 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 720 - 720p 960 x 540
Lens:	3.7 mm
View angle:	72 °
S/N ratio:	50 dB
IR illuminator power adjustment:	Automatic
Range of IR illumination:	15 m
Image compression method:	H.264 MJPEG
Alarm inputs / outputs:	—
Bitrate:	16 ... 8000 kbps
Main stream frame rate:	max. 25 fps - 1080p
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	TCP/IP, UDP, HTTP, DHCP, RTP/RTSP, DNS, DDNS, NTP, PPPOE, UPNP, SNMP, ONVIF
Audio:	—
WEB Server:	Built-in
Max. number of on-line users:	10
ONVIF:	2.0 - port 8000
RS-485 interface:	—

Mobile phones support:	Available applications for mobile systems: iPhone, Android, Windows Mobile, Blackberry, Symbian Meye application - mobile port 5053
Main features:	• ICR - Movable InfraRed filter • Possibility to change the resolution, quality and bit rate • Motion Detection • Privacy zones • Configurable: brightness, contrast, saturation • Sharpness - sharper image outlines • Mirror - Mirror image • Day/night mode
Power supply:	• PoE (802.3af) • 12 V DC / 450 mA
Housing:	Metal
Color:	Dark graphite
"Index of Protection":	IP66
Operation temp:	-20 °C ... 60 °C
Weight:	0.4 kg
Dimensions:	Ø 66 x 166 mm
Supported languages:	English, Polish
Manufacturer / Brand:	GEMINI
Guarantee:	2 years


PRESENTATION



Side view (the cable is hidden inside the bracket):



Bracket dimensions:

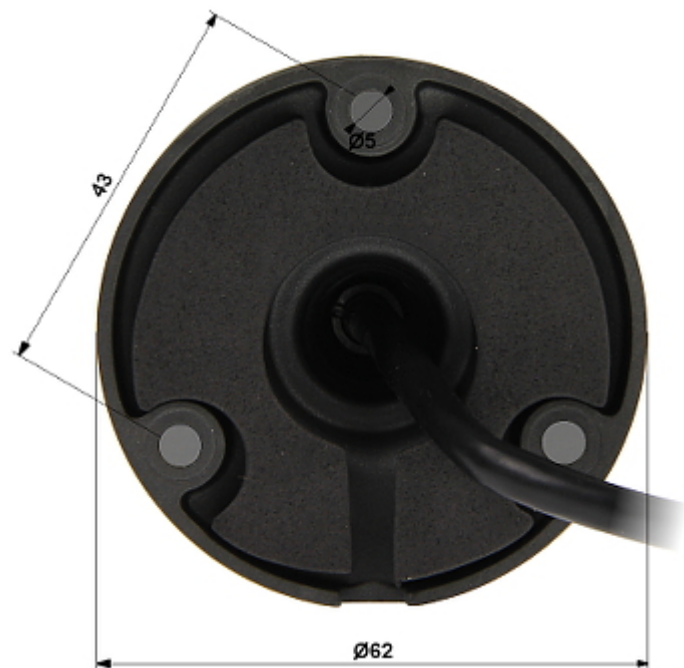

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



- The DNR function reducing the image noise is not implemented in the camera.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------