

Code: DS-2DE4225W-DE

IP SPEED DOME CAMERA OUTDOOR **DS-2DE4225W-DE** - 1080p 4.8 ... 120 mm Hikvision

Net: **586.49 EUR** Gross: **586.49 EUR**

IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 1080p. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition. PoE powering possibility, compatible with the 802.3at standard makes the device more universal and easier to install. For a few models of IP cameras working at $\geq 1920 \times 1080$ resolution we recommend to use of network with 1Gb/s bandwidth.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p
Scanning system:	Progressive
Lens:	4.8 ... 120 mm
View angle:	• 58 ° ... 2.5 ° (manufacturer data) • 54 ° ... 3.4 ° (our tests result)
Optical zoom:	x 25
Digital zoom:	x 16
Min. illumination:	• 0.005 Lux @ F1.6 (color), • 0.001 Lux @ F1.6 (B/W)
Video output:	—
Preset rotation speed:	160 °/s (horizontal) 120 °/s (vertical)
Rotation speed (manual control):	0.1 °/s ... 160 °/s (horizontal) 0.1 °/s ... 120 °/s (vertical)
Horizontal rotation range:	360 ° continuous

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Vertical rotation range:	-15 ° ... 90 °
RS-485 interface:	—
Number of presets:	300
Horizontal scan:	✓
Route settings:	8
Image compression method:	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Bitrate:	32 ... 16384 kbps
Alarm inputs / outputs:	1 / 1
Audio:	• External microphone input, • Audio output, • Audio detection
Main stream frame rate:	25 fps @ 1080p 50 fps @ 1.3 Mpx
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, HTTPS, IEEE 802.1x, QoS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP/IP, UDP, IGMP, ICMP, DHCP, PPPoE, Bonjour
WEB Server:	Built-in, NVR compliance
Max. number of on-line users:	20
ONVIF:	16.12
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
Main features:	• WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • EIS - Electronic Image Stabilization • Parking action - this function enables to locate the camera to specific position automatically if operator doesn't operate the controller for some time • ROI - improve the quality of selected parts of image • F-DNR (Defog) - Reduction of image noise caused by precipitation • Configurable Privacy Zones - 24 • ICR - Movable InfraRed filter • BLC - Back Light Compensation • HLC - High Light Compensation (spot) • Sharpness - sharper image outlines • Mirror - Mirror image • Day/Night mode (color/b&w/auto) • Audio detection • Intelligent Image Analysis : crossing the line (tripwire), intrusion, detection of entry into the area / exit from the area, abandoned/missing object
Mobile phones support:	Port no.: 8000 or access by a cloud (P2P) • Android: Free application iVMS-4500 or Hik-Connect • iOS (iPhone): Free application iVMS-4500 or Hik-Connect
Default IP address:	192.168.1.64
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application
Mobile client access ports:	8000
Port ONVIF:	80
RTSP URL:	• Main stream rtsp://192.168.1.64:554/Streaming/Channels/101/ - RTSP - without authorization rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ - with authorization • Sub stream rtsp://192.168.1.64:554/Streaming/Channels/102/ - RTSP - without authorization rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/ - with authorization




Power supply:	• PoE (802.3at), • 12 V DC / 1.5 A
Power consumption:	≤ 18 W
Housing:	Speed Dome Metal
Color:	White
"Index of Protection":	IP66
Vandal-proof:	—
Operation temp:	-30 °C ... 65 °C
Weight:	2.03 kg
Dimensions:	Ø 180 x 240 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Hungarian, Italian
SAP Code:	301312136
Manufacturer / Brand:	Hikvision
Guarantee:	3 years

PRESENTATION


Bottom view:



Memory card slot:

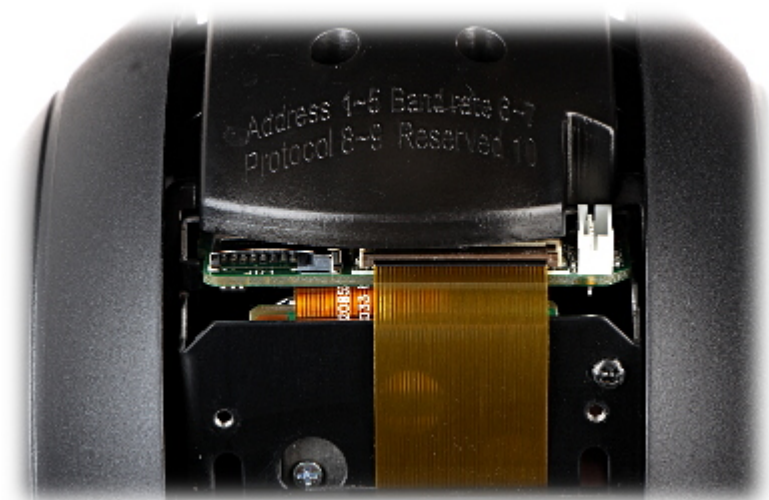

Camera dimensions:

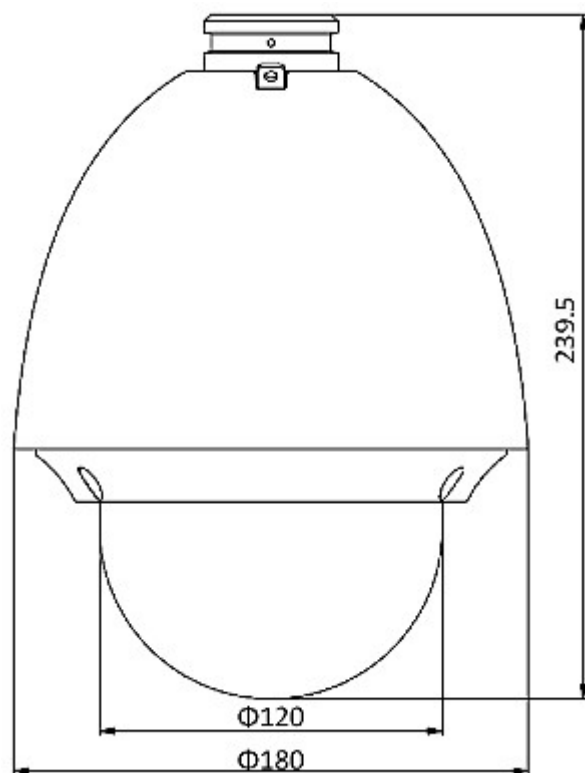

Connectors:



Connectors description:



In the kit:



OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with external IR illuminator on:



Camera image at direct strong light opposite to camera:

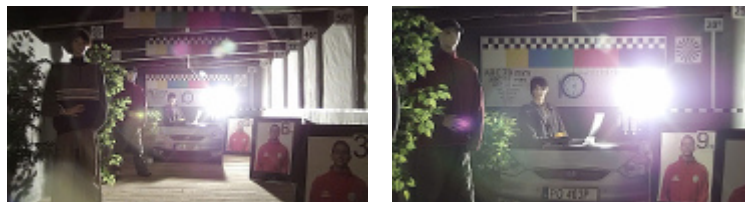

Camera image at night conditions, at different illumination values show below:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------