

Code: DS-2DE3404W-DE(T5)

IP SPEED DOME CAMERA OUTDOOR **DS-2DE3404W-DE(T5)** - 3.7 Mpx 2.8 - 12 mm MOTOZOOM Hikvision

Net: **514.18 EUR** Gross: **514.18 EUR**

IP camera equipped with very good high resolution sensor. Due to detailed image and wide view angle this camera is perfect solution for surveillance systems requiring persons or vehicles recognition, for example at places like: buildings entrance, lobbies, lounges, etc.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " Progressive Scan CMOS
Matrix size:	4 Mpx
Resolution:	2560 x 1440 - 3.7 Mpx , 1920 x 1080 - 1080p , 1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p
Lens:	2.8 - 12 mm, AutoFocus Motozoom
View angle:	94 ° ... 32 °
Optical zoom:	x 4
Digital zoom:	x 16
IR illuminator:	—
Video output:	—
Preset rotation speed:	• 60 °/s (horizontal) • 50 °/s (vertical)
Rotation speed (manual control):	• 0.1 °/s ... 60 °/s (horizontal), • 0.1 °/s ... 50 °/s (vertical)
Horizontal rotation range:	350 ° - Rotation of the head is limited by stops
Vertical rotation range:	0 ° ... 90 °

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

RS-485 interface:	✓
Number of presets:	300
Horizontal scan:	—
Route settings:	8
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	1 / 1
Audio:	• External microphone input • Audio output • Audio detection • Noise suppression and echo cancellation
Main stream frame rate:	25 fps @ 3.7 Mpx
Network interface:	10/100 Base-T (RJ-45)
WEB Server:	Built-in, NVR compliance
Max. number of on-line users:	20
ONVIF:	✓
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
Mobile phones support:	Port no.: 8000 or access by a cloud (P2P) • Android: Free application Hik-Connect • iOS: Free application Hik-Connect
Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	192.168.1.64
Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application
Mobile client access ports:	8000
Port ONVIF:	80
RTSP URL:	• Main stream : rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ - with authorization • Sub stream : rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/ - with authorization
Main features:	• WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • F-DNR (Defog) - Reduction of image noise caused by precipitation • SVC (Scalable Video Coding) - technology enabling the transfer of several sub-streams of different quality within one stream • BLC - configurable Back Light Compensation • HLC - High Light Compensation (spot) • NAS - Network Attached Storage support - allows to connect memory resources directly to the computer network • Privacy zones - max. 24 • Motion Detection • ICR - Movable InfraRed filter • Sharpness - sharper image outlines • Image rotation and mirror • Intelligent Image Analysis : abandoned/missing object, crossing the line (tripwire), intrusion, detection of entry into the area / exit from the area, abandoned/missing object
Power supply:	• PoE (802.3af), • 12 V DC / 1 A (power adapter included)
Power consumption:	≤ 10 W
Housing:	Speed Dome, Aluminum alloy + Plastic
Color:	White

"Index of Protection":	IP66
Operation temp:	-30 °C ... 65 °C
Weight:	0.93 kg
Dimensions:	Ø 141 x 107 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Ukrainian, Hungarian, Vietnamese, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	327000441
Guarantee:	3 years

PRESENTATION


Camera view after remove the Dome cover:



Micro SD card slot is located inside the camera:



Mounting side view:

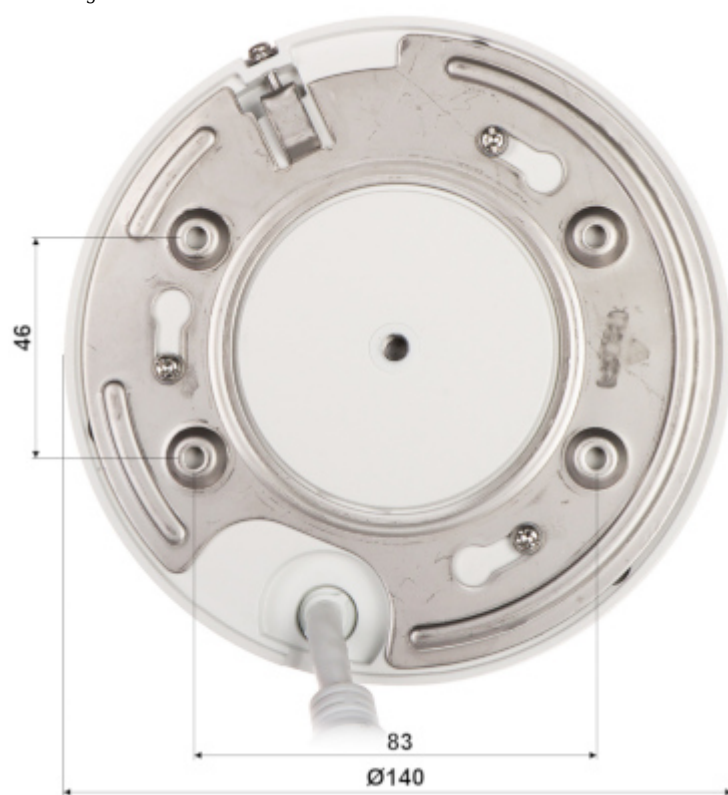


Connectors:



Connectors description:



Camera dimensions:

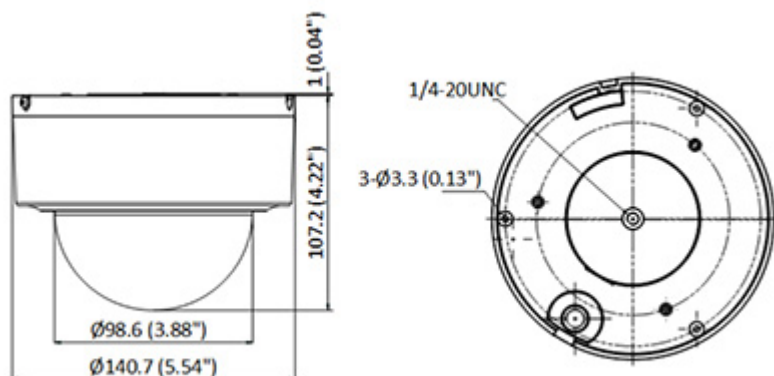

In the kit:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------