

Code: RE-2K

RADIO CONTROLLER **RE-2K** SATEL

Net: **27.65 EUR** Gross: **27.65 EUR**

The RE-2K radio remote controller enables remote control of the electrical equipment by means of radio transmitters (remote keyfobs). The RE-1K is one-channel controller, the RE-2K is two-channel controller. Both types of controllers can work with maximal 16 remote keyfobs.




SPECIFICATION

Operating range in open area:	to 100 m
Number of controlled outputs:	2
Adjustment range of changeover time in monostable mode:	1 s ... 250 s
Maximum current switched over by relay at DC 24V:	2 A
Current-carrying capacity of SS (OC) output:	500 mA
Frequency range:	433.05 MHz ... 434.79 MHz
The KEELOQ code-hopping technology:	✓
Operation temp:	0 °C ... 55 °C
Receiver operation temperature:	-20 °C ... 55 °C
Dimensions:	72 x 118 x 24 mm
Type of remote keyfob battery:	23 A 12 V
Power supply:	DC 12 V
Current consumption (min. / max.):	16 mA / 60 mA
Manufacturer / Brand:	SATEL
Guarantee:	2 years

PRESENTATION

View after remove the cover:

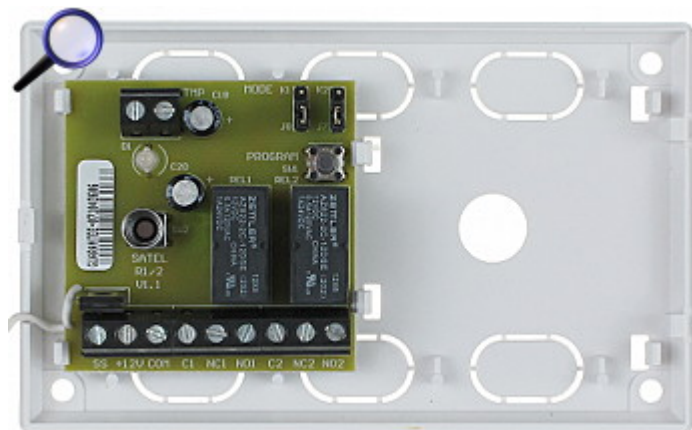

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------