

Code: NVR1104HS-W-S2-CE

NVR NVR1104HS-W-S2-CE Wi-Fi, 4 CHANNELS DAHUA

Net: 173.47 EUR Gross: 173.47 EUR

Network Video Recorder allowing to operate with Wi-Fi
Dahua cameras supported 802.11 b/g/n standards.



SPECIFICATION

Standard:	TCP/IP
Supported resolutions:	max. 6 Mpx - 3072 x 2048 px
Video outputs:	1 pcs HDMI 1 pcs VGA
Audio support:	4 Channels - Audio from cameras
Audio inputs:	1 pcs CINCH
Audio outputs:	1 pcs CINCH
Image compression method:	Smart H.265 / H.265 / Smart H.264 / H.264 / MJPEG
Bitrate:	max. 40 Mbps max. 16 Mbps Wi-Fi
Supported hard drives:	1 x 16 TB SATA
Recording modes:	Manual, Motion Detection, Schedule
External storage devices backup:	Backup to USB drive (pendrive, external drive)
Searching and playback the records:	Records searching: by time and events type. Records playback: forward, backward, fast, slow Advanced searching (to the one second accuracy) 1 or 4 channels synchronous playback, Smart Playback function
Network interface:	• 1 x RJ-45 10/100 Base-TX • 2.4 GHz Wi-Fi - IEEE 802.11 b/g/n
Network functions:	• Built-in Wi-Fi module - Dahua cameras support : Smart, auto-pairing, Remote configuration, Remote management • Full support via network, Remote records copying, Web Server built-in

Network protocols:	HTTP, HTTPS, TCP/IP, IPv4, RTSP, UDP, NTP, DHCP, DNS, Alarm Server, P2P
ONVIF:	✓
Default IP address:	192.168.1.108
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS See how to configure the P2P function in Dahua recorders and how to enable the mobile application
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
USB:	2 pcs USB 2.0
Serial ports:	—
Alarm inputs / outputs:	—
PTZ control:	IP Speed Dome Cameras
Motion Detection:	✓
Intelligent Image Analysis:	—
Main features:	• Privacy zones • VIDEO signal loss alarm
Mouse support:	✓
IR remote controller in the set:	—
Power supply:	12 V DC / 1.5 A (power adapter included)
Power consumption:	≤ 10 W (without HDD)
Operation temp:	-10 °C ... 45 °C
Weight:	0.83 kg
Dimensions:	260 x 248 x 48 mm
Supported languages:	Polish, English, Bulgarian, Czech, Danish, Finnish, French, Greek, Spanish, Dutch, German, Portuguese, Russian, Romanian, Serbian, Slovenian, Swedish, Hungarian, Italian
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front panel:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Rear panel:



In the kit:



Example captures of device interface:

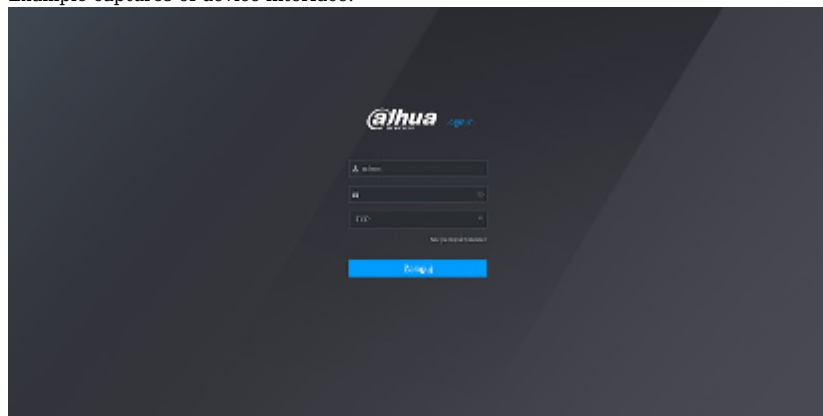



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60