

Code: NVR4116-8P-4KS2

## NVR **NVR4116-8P-4KS2** 16 CHANNELS +8-PORT SWITCH POE DAHUA

Net: **3 734.12 SEK** Gross: **3 734.12 SEK**



### SPECIFICATION

|                                     |                                                                                                                                                                                                                                                                  |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard:                           | TCP/IP                                                                                                                                                                                                                                                           |
| Supported resolutions:              | max. 8.3 Mpx, 4K UHD - 3840 x 2160 px,                                                                                                                                                                                                                           |
| Video outputs:                      | 1 pcs HDMI - 4K UHD<br>1 pcs VGA                                                                                                                                                                                                                                 |
| Audio support:                      | 16 Channels - Audio from cameras                                                                                                                                                                                                                                 |
| Audio inputs:                       | 1 pcs CINCH - External microphone input                                                                                                                                                                                                                          |
| Audio outputs:                      | 1 pcs CINCH                                                                                                                                                                                                                                                      |
| Image compression method:           | H.265 / H.264 / MJPEG                                                                                                                                                                                                                                            |
| Supported hard drives:              | 1 x 6 TB SATA                                                                                                                                                                                                                                                    |
| Recording modes:                    | Manual, Motion Detection, Schedule                                                                                                                                                                                                                               |
| Network protocols:                  | HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, DDNS, IP Filter, PPPoE, FTP, IP Search, ONVIF 2.4                                                                                                                                         |
| External storage devices backup:    | Backup to USB drive (pendrive, external drive)                                                                                                                                                                                                                   |
| Searching and playback the records: | Records searching: by time and events type. Records playback: forward, backward, fast, slow<br>Advanced searching (to the one second accuracy)<br>All channels synchronous playback, Smart Search function                                                       |
| Bitrate:                            | max. 80 Mbps                                                                                                                                                                                                                                                     |
| Network functions:                  | Full support via network, Remote records copying, Web Server built-in<br>max. 128 on-line users                                                                                                                                                                  |
| ONVIF:                              | 2.4                                                                                                                                                                                                                                                              |
| Mobile phones support:              | Port no.: 37777 or access by a cloud (P2P)<br>• Android: Free application <a href="#">DMSS</a><br>• iOS (iPhone): Free application <a href="#">DMSS</a><br><br>See how to configure the P2P function in Dahua recorders and how to enable the mobile application |
| Default IP address:                 | 192.168.1.108                                                                                                                                                                                                                                                    |
| Default admin user / password:      | admin / admin                                                                                                                                                                                                                                                    |
| Web browser access ports:           | 80, 37777                                                                                                                                                                                                                                                        |
| PC client access ports:             | 37777                                                                                                                                                                                                                                                            |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                                  |                                                                                                                                                                                 |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mobile client access ports:      | 37777                                                                                                                                                                           |
| Maximum total switch load:       | 80 W (at full load)                                                                                                                                                             |
| RTSP URL:                        | rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream<br>rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream |
| Alarm inputs / outputs:          | —                                                                                                                                                                               |
| PTZ control:                     | IP Speed Dome Cameras                                                                                                                                                           |
| Motion Detection:                | 22 x 18 motion zones - after motion detection records detected channels only                                                                                                    |
| USB:                             | 2 pcs USB 2.0                                                                                                                                                                   |
| Intelligent Image Analysis:      | ✓                                                                                                                                                                               |
| Mouse support:                   | ✓                                                                                                                                                                               |
| IR remote controller in the set: | —                                                                                                                                                                               |
| Switch PoE:                      | 8-port PoE Switch built-in, 25.5 W / Channel, PoE (802.3af/at)                                                                                                                  |
| Power supply:                    | 48 V DC / 2 A (power adapter included)                                                                                                                                          |
| Weight:                          | 0.67 kg                                                                                                                                                                         |
| Dimensions:                      | 270 x 205 x 46 mm                                                                                                                                                               |
| Supported languages:             | English, Polish                                                                                                                                                                 |
| Country of origin:               | China                                                                                                                                                                           |
| Manufacturer / Brand:            | DAHUA                                                                                                                                                                           |
| Guarantee:                       | <b>3 years</b>                                                                                                                                                                  |

## PRESENTATION

Top view:



Rear panel:





In the kit:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Example captures of device interface:

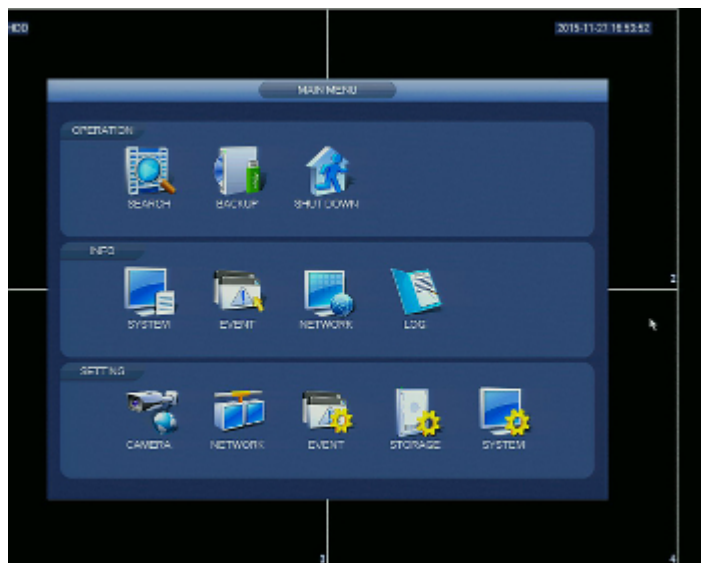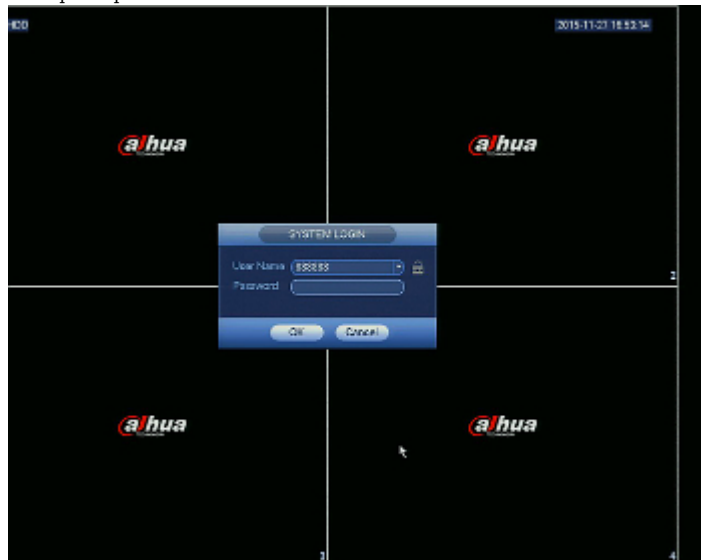

## OUR OPINIONS



- Audio transmission via network.

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60