

Code: BCS-DMIP1401AM-III

IP VANDALPROOF CAMERA **BCS-DMIP1401AM-III** - 4 Mpx, 2.8 mm

Net: **2 015.33 SEK** Gross: **2 015.33 SEK**

IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 2688 x 1520 (4.0 MPx).

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

Camera is according to IP66 Index of Protection norm.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/3 " Progressive Scan CMOS
Matrix size:	4 Mpx
Scanning system:	Progressive
Resolution:	2688 x 1520 - 4 Mpx , 2560 x 1440 - 3.6 Mpx , 2304 x 1296 - 3.0 Mpx , 1920 x 1080 - 1080p , 1280 x 1024 - 1.4 Mpx , 1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p
Lens:	2.8 mm
View angle:	104 °
S/N ratio:	> 50 dB
RS-485 interface:	—
Image compression method:	H.265 / H.264 / MJPEG
Alarm inputs / outputs:	—
Audio:	Microphone built-in
Bitrate:	24 ... 10240 kbps - H.264 14 ... 9984 kbps - H.265 256 ... 40960 kbps - MJPEG
Main stream frame rate:	25 fps @ 4.0 Mpx
Network interface:	100/1000 Base-T (RJ-45)
Network protocols:	TCP/IP, HTTP, UDP, TCP, SMTP, FTP, DHCP, DNS, DDNS, NTP, UpnP, RTSP, P2P
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Default admin user / password:	admin / admin

Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
WEB Server:	Built-in
Max. number of on-line users:	20
ONVIF:	2.42
Main features:	• WB - White Balance (ATW/AWB/manual/indoor/outdoor) • AGC - Automatic Gain Control • BLC/HLC - Back Light / High Light Compensation • 3D-DNR - Digital Noise Reduction • WDR - 120 dB - Wide Dynamic Range • Possibility to change the resolution, quality and bit rate • Time mark and image description • Image rotation and mirror • Configurable: brightness, contrast, saturation • Privacy zones • Motion Detection • Audio detection • Intelligent image analysis : crossing the line (tripwire), intrusion, scene changing, abandoned/missing object, face detection
Power supply:	• PoE (802.3af), • 12 V DC / 250 mA
Power consumption:	≤ 3 W
Housing:	Dome - Metal
Vandal-proof:	✓
Color:	White
Operation temp:	-30 °C ... 60 °C
"Index of Protection":	IP66
Weight:	0.266 kg
Dimensions:	Ø 110 x 54 mm
Supported languages:	Polish, English
Manufacturer / Brand:	BCS
Guarantee:	3 years

PRESENTATION

Camera view after remove the Dome cover:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Memory card slot:



Mounting dimensions:



Camera dimensions:

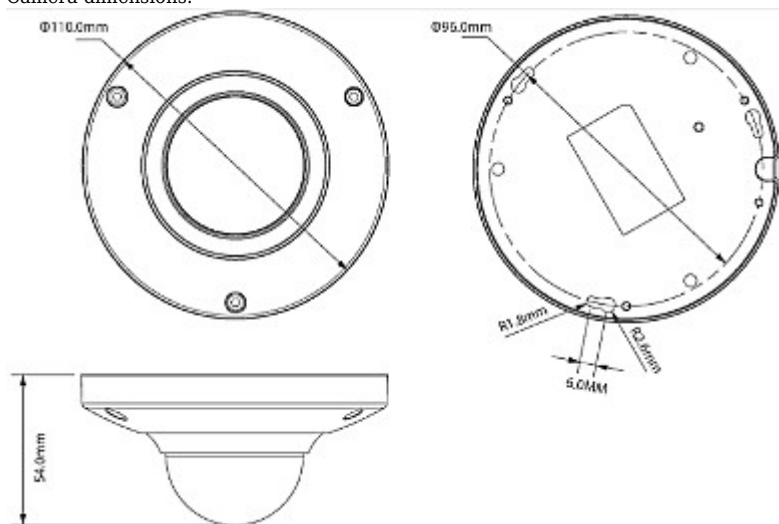

In the kit:



OUR TESTS



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at artificial illumination (about 30Lux):



Camera image at direct strong light opposite to camera:



Camera image at night conditions, at different illumination values show below:

1 LUX:



0.1 LUX:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------