


Code: INT-O

## EXPANDER **INT-O** 8 OUTPUTS SATEL

Net: **65.76 EUR** Gross: **65.76 EUR**

The INT-O expander allows to expand the system with 8 programmable wired outputs. This device is dedicated for INTEGRA, INTEGRA Plus, VERSA, PERFECTA alarm control panels.

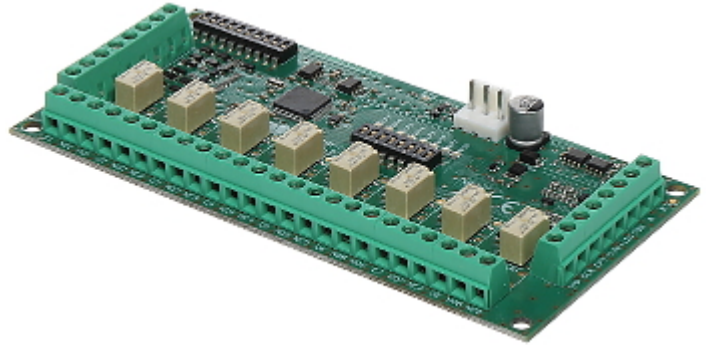


### SPECIFICATION

|                                                                      |                                                                                                                                                                                    |
|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of outputs:                                                   | 8 pcs - programmable                                                                                                                                                               |
| Outputs type:                                                        | <ul style="list-style-type: none"><li>• 8 pcs OC,</li><li>• 8 pcs Relay</li></ul>                                                                                                  |
| Tamper output:                                                       | ✓                                                                                                                                                                                  |
| Load capacity of OC type programmable outputs:                       | 50 mA / 12 V DC                                                                                                                                                                    |
| Relay switching current:                                             | max. 2 A DC                                                                                                                                                                        |
| Relay switching voltage:                                             | max. 24 V DC                                                                                                                                                                       |
| Current consumption by active relay:                                 | 16 mA                                                                                                                                                                              |
| Current consumption (w/o OC type output load and w/o active relays): | 36 mA                                                                                                                                                                              |
| Power supply:                                                        | 12 V DC / 160 mA (max)                                                                                                                                                             |
| Main features:                                                       | <ul style="list-style-type: none"><li>• Current-carrying capacity of +12V output 2.5 A / 12 V DC</li><li>• Each OC type output is parallel connected to the relay output</li></ul> |
| Operation temp:                                                      | -10 °C ... 55 °C                                                                                                                                                                   |
| Weight:                                                              | 0.09 kg                                                                                                                                                                            |
| Dimensions:                                                          | 140 x 68 mm                                                                                                                                                                        |
| Manufacturer / Brand:                                                | SATEL                                                                                                                                                                              |
| Guarantee:                                                           | 2 years                                                                                                                                                                            |


### PRESENTATION

PCB:

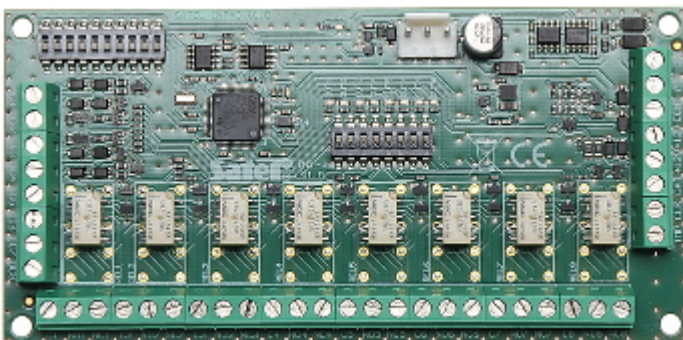

Connectors:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

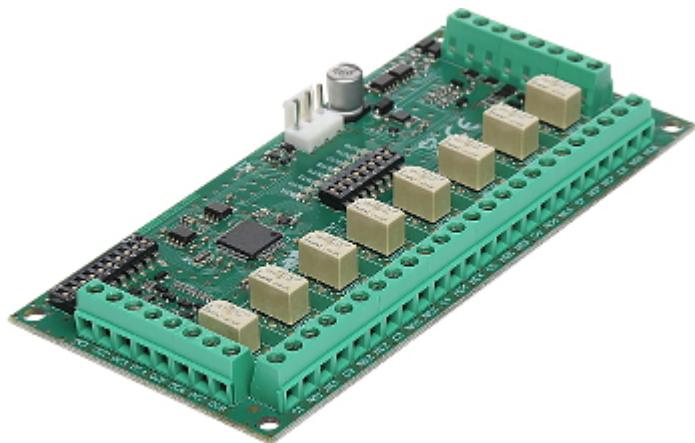

In the kit:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60