

Code: JA-154E

WIRELESS KEYPAD **JA-154E** JABLOTRON

Price visible after login

The JA-154E wireless keypad enables control and programming of the system. It has built-in proximity access card reader, additionally equipped with an input for connecting a wired detector.

Keypad is designed to installation indoors only, typically by the main entrance door. You should avoid locating it close to metal objects, which could shield radio communication. Keypad is powered by battery (included) and communicates with alarm control panel using a special JABLOTRON radio transmission protocol (bidirectional communication).

Attention! Battery not included.



SPECIFICATION

Support:	JABLOTRON 100
Frequency band:	868.1 MHz JABLOTRON protocol
Radio communication range (at open area):	~ 200 m
LCD display:	✓
Access control cards:	Jablotron PC-01 / PC-02 (EM UNIQUE 125kHz)
Input for opening detector:	IN = Normal Close (NC)
Battery power supply:	4 x AA alkaline battery (not included)
Battery lifetime:	~ 1 year
EN 50131-1, EN 50131-3, EN 50131-6, EN 50131-5-3:	Class II
Compliance with standards:	EN 50131-1 EN 50131-3
Operation temp:	-10 °C ... 40 °C
Weight:	0.35 kg
Dimensions:	102 x 145 x 33 mm
Manufacturer / Brand:	JABLOTRON
Guarantee:	2 years


PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Internal view:

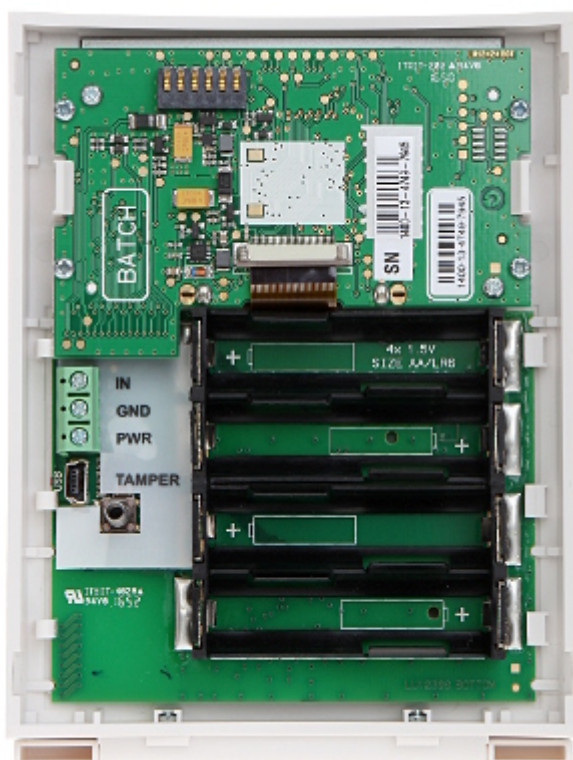

Mounting side view:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------