

Code: DS-PDBG8-EG2

ACOUSTIC GLASS BREAK DETECTOR **DS-PDBG8-EG2** Hikvision

Net: **28.68 EUR** Gross: **28.68 EUR**



Sensor signals an alarm on registering a low-frequency tone (impact sound), followed by a high-frequency tone (sound of broken glass). The sensor starts to analyze a high-frequency channel after receiving the low-frequency sound wave, caused by the impact.

SPECIFICATION

Detection:	Glass break detector
Range:	max. 8 m
Detection angle:	120 °
Environment class:	II
Sensitivity adjustment:	✓
Alarm signaling:	• LED diodes : - Red - high frequency trigger - Green - low frequency trigger - Blue - Alarm signaling, • Signal to control panel
Alarm output:	NC
Power supply:	9 ... 16 V DC / 25 mA @ 12 V (max)
Main features:	• detection of breaking plate, laminated or tempered glass • Glass thickness : 2.4 mm ... 6.4 mm • Glass size : 0.3 m x 0.3 m ... 3 m x 3 m • Digital detector • trimmer sensitivity adjustment • Tamper detection - opening the enclosure
Color:	White
Operation temp:	-10 °C ... 55 °C
Weight:	0.05 kg
Dimensions:	23 x 107 x 39 mm

Manufacturer / Brand:	Hikvision
SAP Code:	314300154
Guarantee:	2 years


PRESENTATION

Front view:



Internal view of the housing:



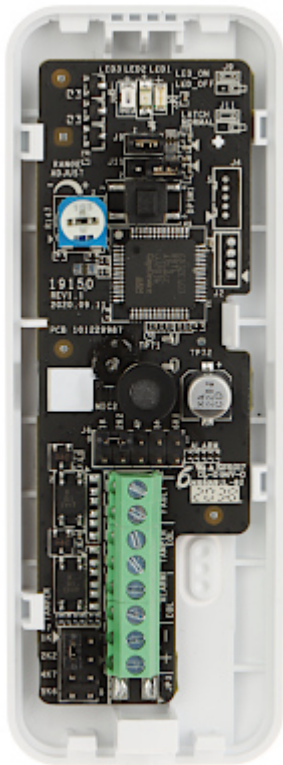



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------