

Code: MAGENTA

ACOUSTIC GLASS BREAK DETECTOR **MAGENTA** SATEL

Net: **20.98 EUR** Gross: **20.98 EUR**

Sensor signals an alarm on registering a low-frequency tone (impact sound), followed by a high-frequency tone (sound of broken glass). The sensor starts to analyze a high-frequency channel after receiving the low-frequency sound wave, caused by the impact.

Detection by the microphone the impact sound wave is indicated by LED blink. The high-frequency channel is analyzed for 4 seconds. If during this time the high-frequency tone (sound of broken glass) is detected, the detector will trigger an alarm.



SPECIFICATION

Detection:	Glass break detector
Range:	max. 6 m
Environment class:	II
Sensitivity adjustment:	✓
Alarm signaling:	LED indicator, Signal to control panel
Relay contacts rating (resistive load):	40 mA / 16 V DC
Power supply:	12 V DC / 10 mA
Main features:	• detection of breaking plate, laminated or tempered glass • advanced dual-path microprocessor signal analysis • trimmer sensitivity adjustment
Color:	White
Operation temp:	-10 °C ... 55 °C
Weight:	0.04 kg
Dimensions:	24 x 110 x 27 mm
Manufacturer / Brand:	SATEL
Guarantee:	2 years

PRESENTATION


View after remove the cover:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Description of particular elements of the device:

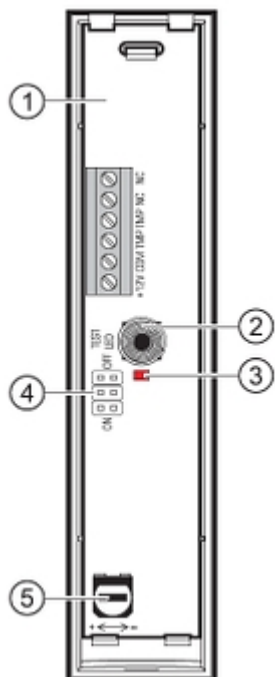

1. cable terminals
2. tamper contact
3. LED indicator
4. configuration jumpers
5. potentiometer for detection sensitivity adjustment

Mounting side view:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

