


Code: JA-190X

# TELEPHONE PSTN COMMUNICATION MODULE **JA-190X** JABLOTRON

Price visible after login

The JA-190X telephone communication module is designed to the JA-101K(R) and JA-106K(R) control panels. The device allows to send information about the events to the CID, SIA monitoring (ARC) stations and to the user (voice message). The module also enables to remote control of the system.

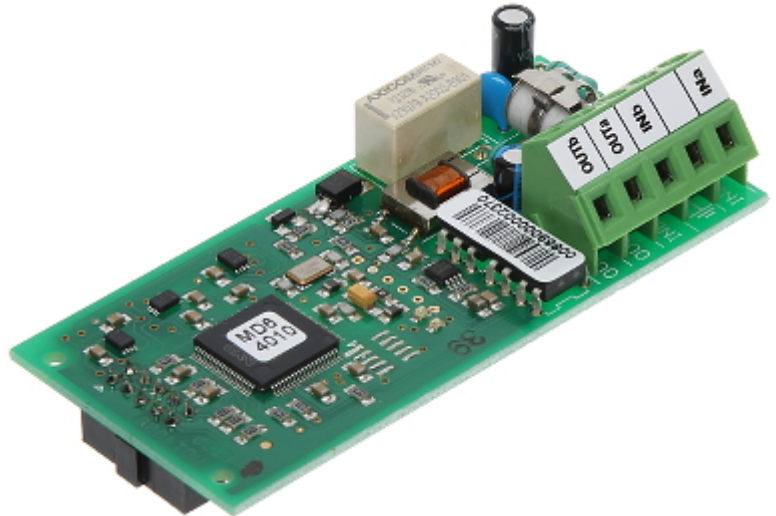

## SPECIFICATION

|                               |                                                                                                                                                                                                                                                                                                               |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Support:                      | JA-101K, JA-101KR, JA-106K, JA-106KR                                                                                                                                                                                                                                                                          |
| Number of inputs:             | 2                                                                                                                                                                                                                                                                                                             |
| Number of outputs:            | 2                                                                                                                                                                                                                                                                                                             |
| Communication:                | DTMF                                                                                                                                                                                                                                                                                                          |
| Voice messages phone numbers: | <ul style="list-style-type: none"><li>• 8 JA-101K</li><li>• 15 JA-106K</li></ul>                                                                                                                                                                                                                              |
| Transmission protocols:       | CID, SIA                                                                                                                                                                                                                                                                                                      |
| Transmission class:           | ATS 2, ATS 4                                                                                                                                                                                                                                                                                                  |
| Environment class:            | II indoor area according to EN 50131-1                                                                                                                                                                                                                                                                        |
| Compliance with standards:    | ETSI EN 300 220, EN 50130-4, EN 55022, EN 60950-1, EN 301437, TBR 21                                                                                                                                                                                                                                          |
| Main features:                | <ul style="list-style-type: none"><li>• Voice menu for easy operation of the alarm control panel with any DTMF telephone</li><li>• Detection of dial tone</li><li>• Detection of busy tone</li><li>• Control of phone line interruption</li><li>• Simulated telephone line</li><li>• LED indication</li></ul> |
| Operation temp:               | -10 °C ... 40 °C                                                                                                                                                                                                                                                                                              |
| Weight:                       | 0.03 kg                                                                                                                                                                                                                                                                                                       |
| Dimensions:                   | 82 x 39 x 26 mm                                                                                                                                                                                                                                                                                               |
| Manufacturer / Brand:         | JABLOTRON                                                                                                                                                                                                                                                                                                     |
| Guarantee:                    | 2 years                                                                                                                                                                                                                                                                                                       |


## PRESENTATION

Top view:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Bottom view:

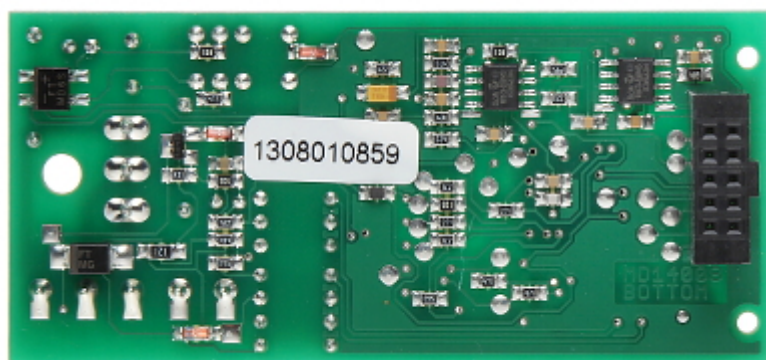

Device schematic diagram:

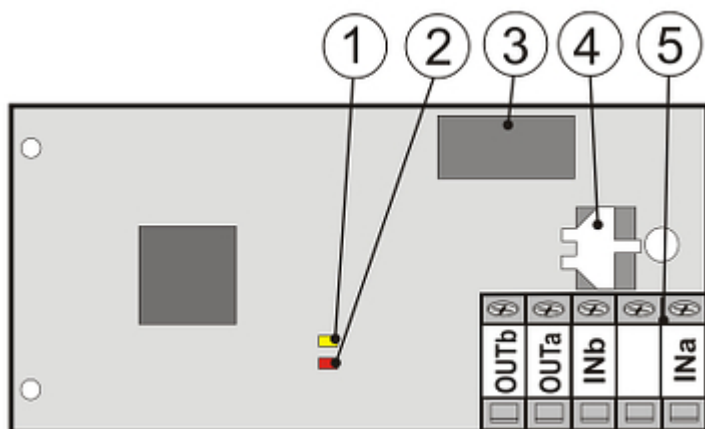

- 1 Yellow LED - fault indicator
- 2 Red LED - activity
- 3 Telephone relay
- 4 Protection component
- 5 Terminals

## PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

