

Code: DS-PDBG8-EG2-WE

WIRELESS ACOUSTIC GLASS BREAK DETECTOR AX PRO **DS-PDBG8-EG2-WE** Hikvision

Net: 65.60 EUR Gross: 65.60 EUR



Glass break detector.

The DS-PDBG8-EG2-WE supports the other devices compatible with wireless HIKVISION AX PRO system.

SPECIFICATION

Support:	HIKVISION AX PRO
Detection:	Glass break detector
Range:	max. 8 m
Detection angle:	120 °
Sensitivity adjustment:	2, 4, 6, 8 m
Alarm signaling:	• LED indicator : Color - blue, • Signal to control panel
Frequency range:	868 MHz - Tri-X Wireless
Radio communication range (at open area):	max. 1600 m
Alarm inputs:	NO/NC
Power supply:	2 x battery CR123A 3 V (included)
Backup time:	~ 5 years
Current consumption:	max. 24 mA



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Main features:	• The sensor operation is based on omni-directional high quality microphone • detection of breaking plate, laminated or tempered glass - Glass thickness : 2.4 mm ... 6.4 mm, Glass size : 0.3 m x 0.3 m ... 3 m x 3 m • Digital detector • Signal indicator • Bidirectional communication • AES-128 data encryption • Frequency hopping against jamming for reliable transmission • Tamper detection - opening the enclosure, removing from mounting surface • Remote management
Environment class:	II
Color:	White
Operation temp:	-10 °C ... 55 °C
Weight:	0.08 kg
Dimensions:	24 x 107 x 39 mm
Manufacturer / Brand:	Hikvision
SAP Code:	314300119
Guarantee:	2 years

PRESENTATION

Front view:



Internal view of the housing:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Mounting side view:



In the kit:

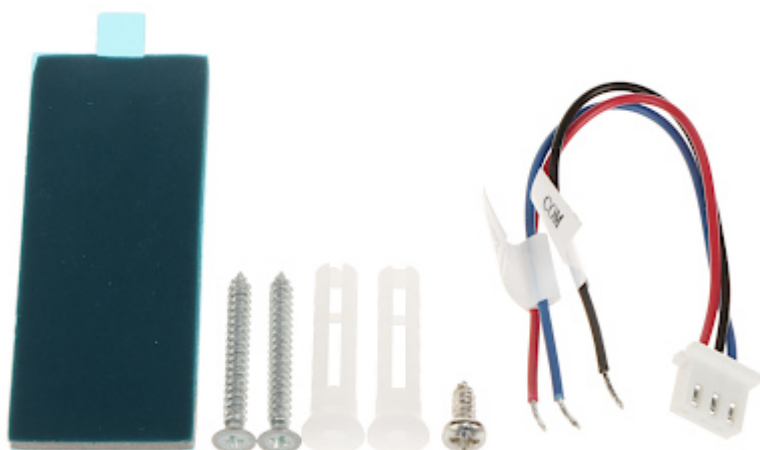

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------