

Code: JA-180B

WIRELESS GLASS BREAK DETECTOR **JA-180B** JABLOTRON

Price visible after login

Sensor signals an alarm on registering a low-frequency tone (impact sound), followed by a high-frequency tone (sound of broken glass). The sensor starts to analyze a high-frequency channel after receiving the low-frequency sound wave, caused by the impact.

The device is powered by battery, for communication is used the JABLOTRON radio protocol.

Attention! Battery not included.



SPECIFICATION

Support:	JABLOTRON 100
Detection:	Glass break detector
Frequency band:	868.1 MHz
Radio communication range (at open area):	max. 100 m
Alarm signaling:	Signal to control panel
Tamper contact:	✓
Battery:	LS(T)14500 (AA 3.6 V 2000 mAh) (not included)
Backup time:	max. 3 years
Protection class (Grade):	Grade 2
Environmental class EN 50130-5:	—
Main features:	• The LED to indicate violations in test mode, easy start-up and later maintenance of the system • detection of breaking plate, laminated or tempered glass
Operation temp:	-10 °C ... 40 °C
Permissible relative humidity:	93 ± 3 %
Color:	White
Weight:	0.060 kg
Dimensions:	107 x 28 x 22 mm
Manufacturer / Brand:	JABLOTRON
Guarantee:	2 years

PRESENTATION


Rear view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60





View after remove the cover:

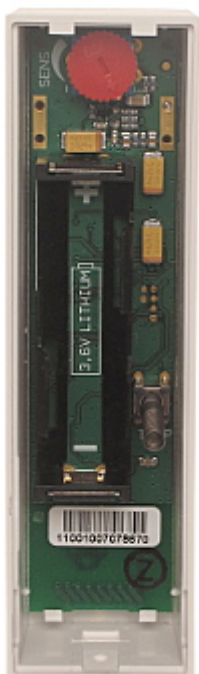

Description of particular elements of the device:

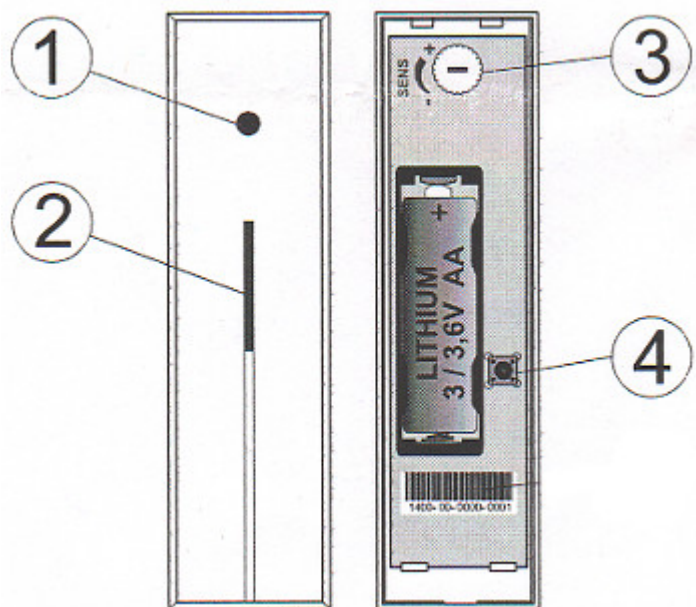

- 1 detector
 2 LED indicator
 3 potentiometer for detection sensitivity adjustment
 4 tamper contact
 Detector range:



- 1 Top view
 2 Side view

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------